

# NS 15 WH PERF 2000MM-VPE 10 - DIN rail perforated



1204096

<https://www.phoenixcontact.com/in/products/1204096>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

## Commercial Data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1204096             |
| Packing unit                         | 10 pc               |
| Minimum order quantity               | 10 pc               |
| Sales Key                            | BE7                 |
| Product Key                          | BE7223              |
| Catalog Page                         | Page 523 (C-3-2019) |
| GTIN                                 | 4017918106430       |
| Weight per Piece (including packing) | 308 g               |
| Weight per Piece (excluding packing) | 308 g               |
| Customs tariff number                | 72166190            |
| Country of origin                    | DE                  |

# NS 15 WH PERF 2000MM-VPE 10 - DIN rail perforated



1204096


<https://www.phoenixcontact.com/in/products/1204096>

## Technical Data

### Product properties

|              |          |
|--------------|----------|
| Product type | DIN rail |
|--------------|----------|

### Dimensions

|                     |  |
|---------------------|--|
| Dimensional drawing |  |
| Width               | 15 mm  |
| Hole width          | 12.2 mm  |
| Height              | 5.5 mm   |
| Hole height         | 4.2 mm   |
| Length              | 2000 mm  |
| Drill hole spacing  | 20 mm  |

### Material specifications

|          |                              |
|----------|------------------------------|
| Color    | silver                       |
| Material | Steel                        |
| Coating  | Galvanized, white passivated |

### Standards and regulations

|                                  |                  |
|----------------------------------|------------------|
| Connection in acc. with standard | IEC / EN         |
| Tests                            | acc. to EN 60715 |


# NS 15 WH PERF 2000MM-VPE 10 - DIN rail perforated

1204096

<https://www.phoenixcontact.com/in/products/1204096>

## Drawings

Dimensional drawing

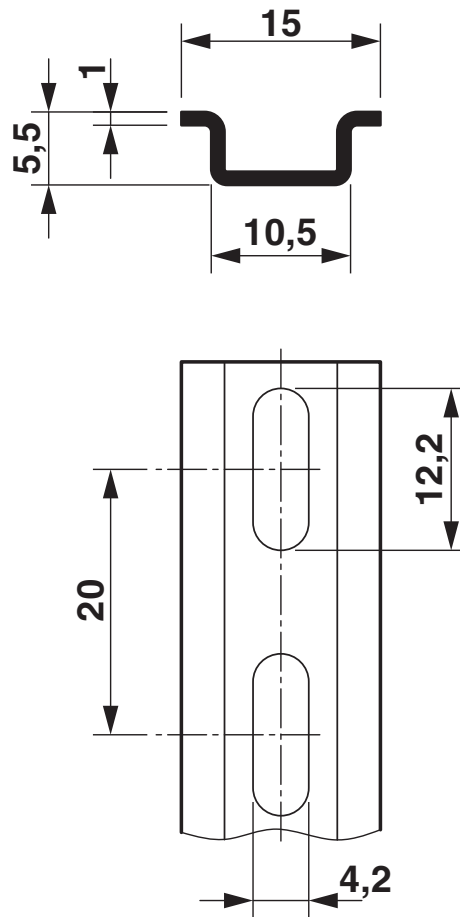

# NS 15 WH PERF 2000MM-VPE 10 - DIN rail perforated



1204096

<https://www.phoenixcontact.com/in/products/1204096>

## Classifications

### ECLASS

|             |             |
|-------------|-------------|
| ECLASS-11.0 | 27400602    |
| ECLASS-13.0 | Tragschiene |
| ECLASS-13.0 | Tragschiene |
| ECLASS-12.0 | 27400602    |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC001285 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121700 |
|-------------|----------|

# NS 15 WH PERF 2000MM-VPE 10 - DIN rail perforated



1204096

<https://www.phoenixcontact.com/in/products/1204096>

## Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.  
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420  
[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)