


Product Leaflet

726-1216 - T/S 6 A SPDT ON(M)-OFF-ON(M).

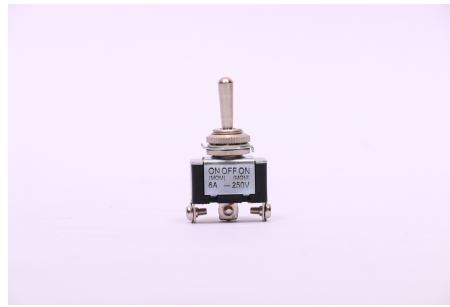

Description

Specifications

- Electrical
 - 6A Contact resistance <10mohms, Insulation Resistance : >1000M ohms and HV >1KV. -
- Climate
 - - 40 to + 80 degrees Celsius -
- Reference Standard
 - JSS 50201 -
- Usage
 - Used in Control Panels, Machines, Stabilizers, UPS, Inverters.
- Life
 - Mechanical - 50000 operations
 - Electrical @ full load - 20000 operations
- Mechanical
 - Panel Mounting - 12 mm Bush
 - Accesories (round nut, hexa nut, star washer, lock washer) - 1 each
 - Optional Accesories (add on) - Rubber boot for IP protection

**Disclaimer : The Specifications mentioned are subject to change and are not binding on us.
Please reconfirm with us for the latest specifications.**