

Datasheet | EC11

EP-612 series



General Purpose AC EMI Filter

Approvals /Conformance



Technical specifications

Operating voltage	120/250 VAC
Current rating	80A-150A
Frequency	50/60Hz
Voltage drop	1 Volt max.
High potential test voltage	P -> E 1500VAC P -> N 1414VDC (applicable for excluding surge suppressor filter)
Insulation resistance	≥ 300 MΩ @ 500VDC (PN→E)
Operating temperature	40°c /-25°c +85°c

*Image shown is for illustrative purpose only

Features and benefits

- | Filters available in single stage and double stage
- | All filters provide high attenuation performance.
- | Two stage filters designed for noisy application requiring excellent filter performance.
- | All filters compliance to EN60939-3:2015 & EN60939-2:2005 standards.
- | High reliable
- | Chassis mountable filter in fabricated metal can.
- | CRCA metal can with nickel plating provides good aesthetic and corrosion protection.
- | Filters available in medical version without capacitor to earth.
- | General purpose filters with low leakage current for safety critical application.
- | With surge suppressor filters also available.
- | Various terminal options are available.

Attenuation Type

Single Stage	Standard
Double Stage	High

Applications

- | Defence application
- | Medical equipment
- | Industrial application
- | UPS
- | Solar inverter
- | Electrical equipment application


Datasheet | EC11

EP-612 series




Mechanical details

For screw terminal

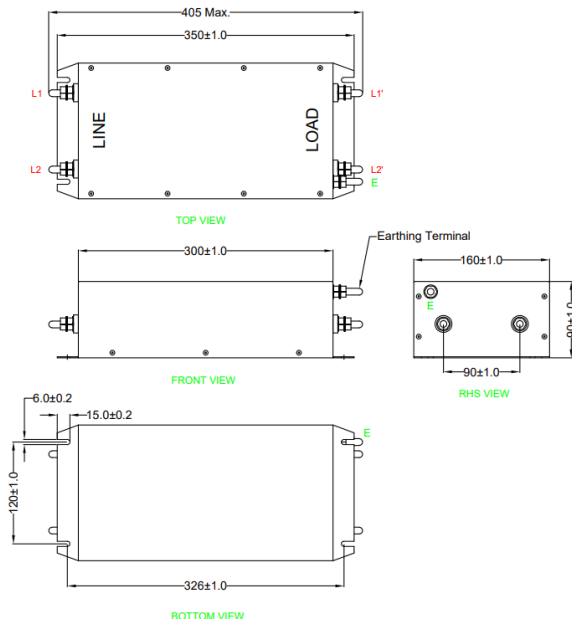

All dimensions in mm


For touch safe terminal

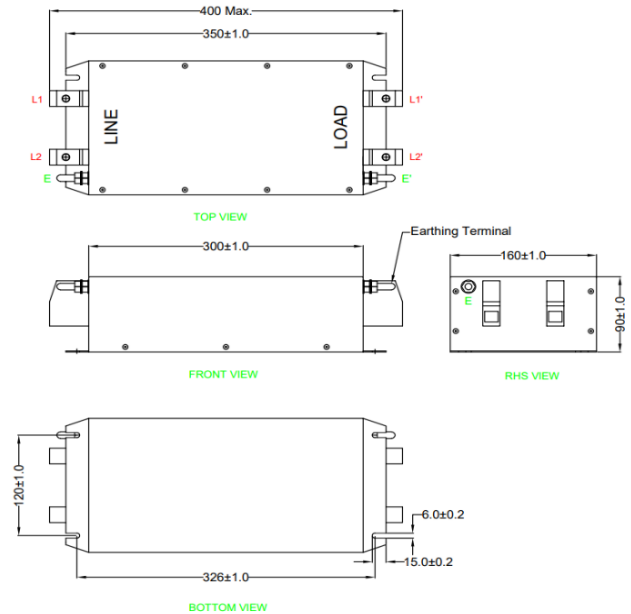


All dimensions in mm

Electrical schematic for Single Stage Filter


General purpose -

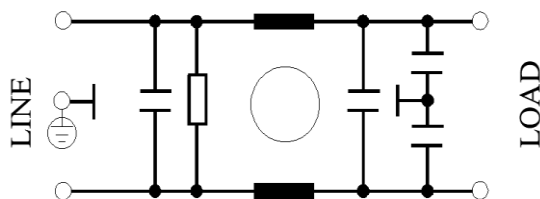


Medical equipment application -

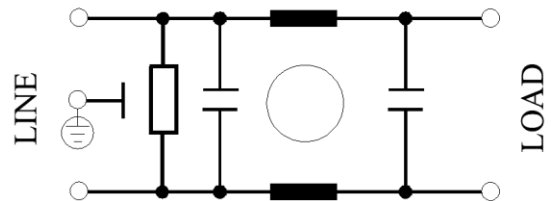

General purpose with Surge Suppressor -

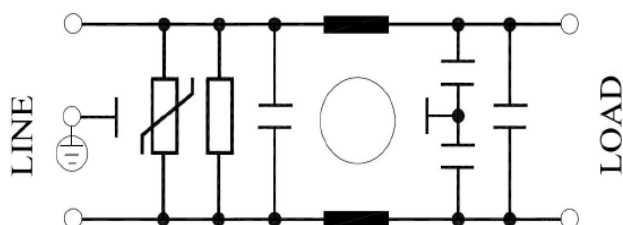

Medical equipment application with Surge Suppressor -

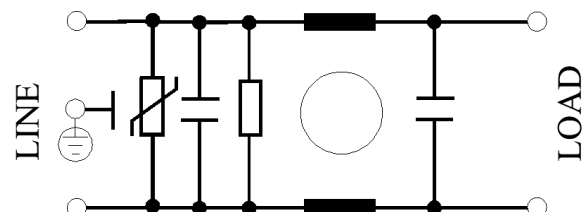


Datasheet | EC11

EP-612 series




Electrical schematic for Double Stage Filter


General purpose –

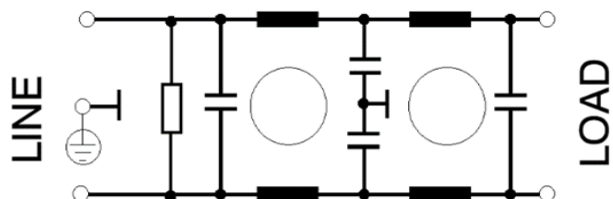


Medical equipment application –

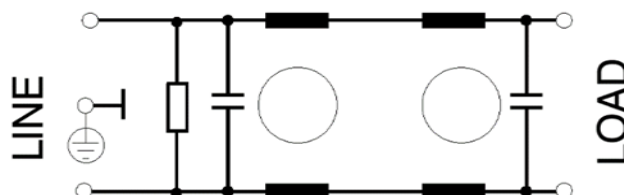

General purpose with Surge Suppressor –

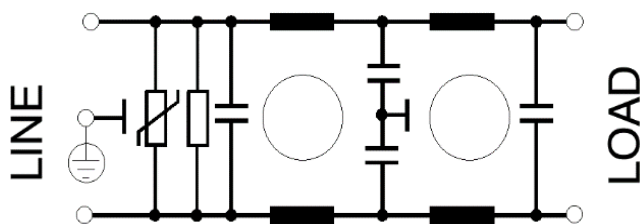

Medical equipment application with Surge Suppressor –



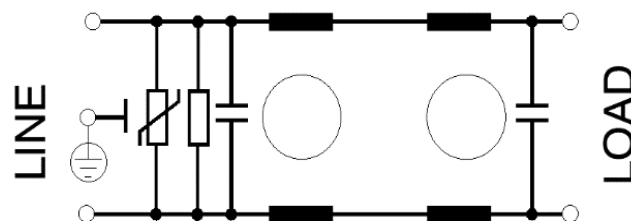


Filter attenuation Graph

C = Common mode (asymmetrical) —————


D = Differential mode (symmetrical) - - - - -

For general application (Single Stage)


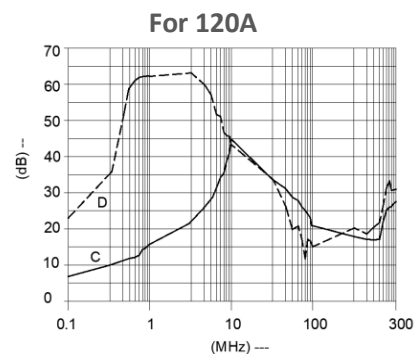
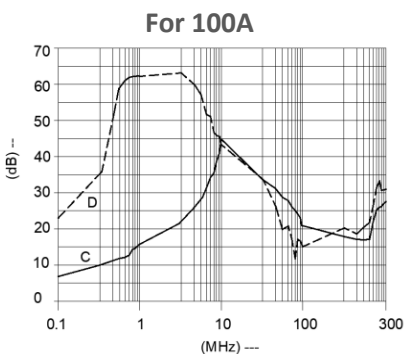
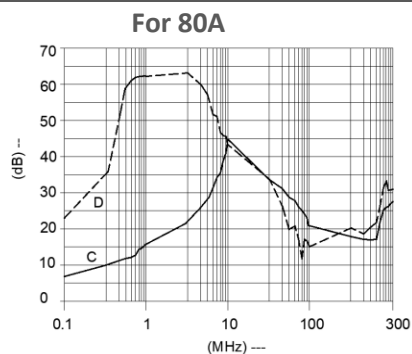


Datasheet | EC11

EP-612 series

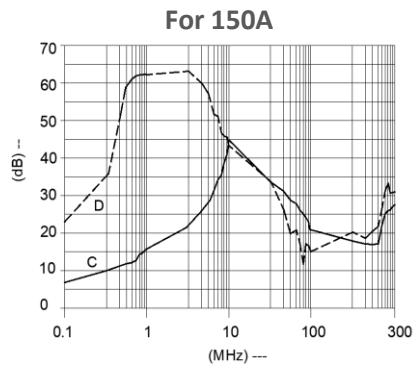

For general application (Double Stage)

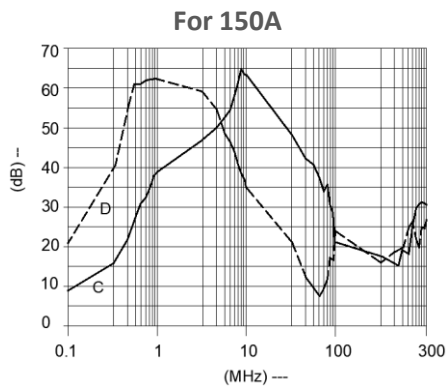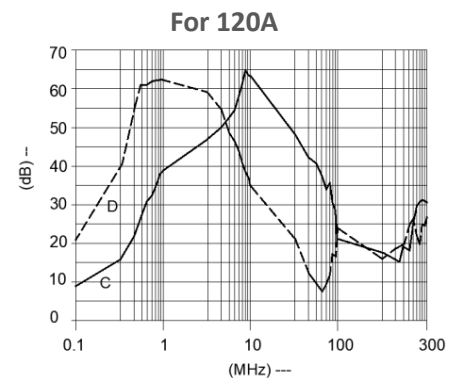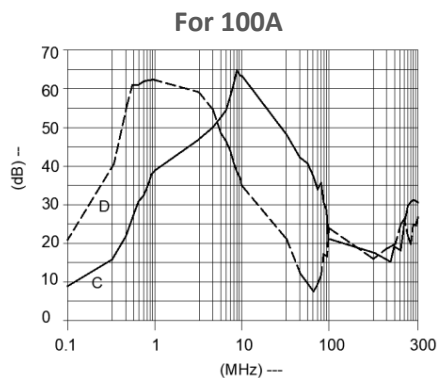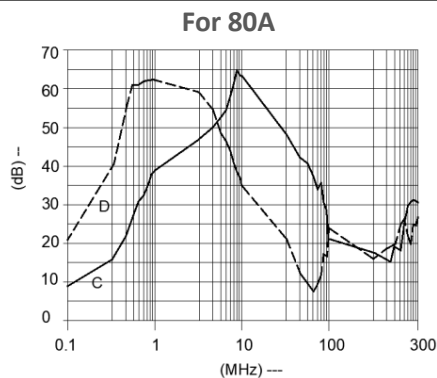

Filter Selection Table

Sr. No.	Elcom part codes (ordering code)	Rated Current rating (A) @40°C	Leakage current (mA) @250VAC	Terminals (X)		Max. Peak current (8/20 μ sec 1 time) (KA)	Energy surge rating (10/1000 μ sec) (Joules)	Approx. Weight (Kg)	Attenuation
				Screw 	Touch-safe 				
1	EF-1B080X01E-C11	80	< 0.5	D	F	----	----	3.5	Standard
2	EF-1B080X02E-C11	80	< 0.5	D	F	10	350	3.5	Standard
3	EF-1B080X03E-C11	80	< 0.003	D	F	----	----	3.5	Standard
4	EF-1B080X04E-C11	80	< 0.003	D	F	10	350	3.5	Standard
5	EF-1B100X01E-C11	100	< 0.5	D	F	----	----	4	Standard

Datasheet | EC11

EP-612 series



6	EF-1B100X02E-C11	100	< 0.5	D	F	10	350	4	Standard
7	EF-1B100X03E-C11	100	< 0.003	D	F	----	----	4	Standard
8	EF-1B100X04E-C11	100	< 0.003	D	F	10	350	4	Standard
9	EF-1B120X01E-C11	120	< 0.5	D	F	----	----	4	Standard
10	EF-1B120X02E-C11	120	< 0.5	D	F	10	350	4	Standard
11	EF-1B120X03E-C11	120	< 0.003	D	F	----	----	4	Standard
12	EF-1B120X04E-C11	120	< 0.003	D	F	10	350	4	Standard
13	EF-1B150X01E-C11	150	< 0.5	D	F	----	----	4.5	Standard
14	EF-1B150X02E-C11	150	< 0.5	D	F	10	350	4.5	Standard
15	EF-1B150X03E-C11	150	< 0.003	D	F	----	----	4.5	Standard
16	EF-1B150X04E-C11	150	< 0.003	D	F	10	350	4.5	Standard
17	EF-1B080X20E-C11	80	< 0.5	D	F	----	----	4	High
18	EF-1B080X21E-C11	80	< 0.5	D	F	10	350	4	High
19	EF-1B080X22E-C11	80	< 0.003	D	F	----	----	4	High
20	EF-1B080X23E-C11	80	< 0.003	D	F	10	350	4	High
21	EF-1B100X20E-C11	100	< 0.5	D	F	----	----	4.5	High
22	EF-1B100X21E-C11	100	< 0.5	D	F	10	350	4.5	High
23	EF-1B100X22E-C11	100	< 0.003	D	F	----	----	4.5	High
24	EF-1B100X23E-C11	100	< 0.003	D	F	10	350	4.5	High
25	EF-1B120X20E-C11	120	< 0.5	D	F	----	----	4.5	High
26	EF-1B120X21E-C11	120	< 0.5	D	F	10	350	4.5	High
27	EF-1B120X22E-C11	120	< 0.003	D	F	----	----	4.5	High
28	EF-1B120X23E-C11	120	< 0.003	D	F	10	350	4.5	High
29	EF-1B150X20E-C11	150	< 0.5	D	F	----	----	5	High
30	EF-1B150X21E-C11	150	< 0.5	D	F	10	350	5	High
31	EF-1B150X22E-C11	150	< 0.003	D	F	----	----	5	High
32	EF-1B150X23E-C11	150	< 0.003	D	F	10	350	5	High

- To compile complete part number, replace the 'X' with required I/O connection terminal. (e.g. EF-1B100D20E-C11)
- Maximum leakage under usual AC operating conditions (acc. IEC 60939-3). Note: if the neutral line is interrupted, worst case leakage could reach twice this level.
- Customize products provided on request.

Datasheet | EC11

EP-612 series




Connection Type

Current Rating (A)	Screw terminal details		Touch safe terminal details		Earthing screw terminal details
	Screw	Recommended tightening torque	Touch safe	Recommended tightening torque	
80	M8	25-30Kgcm	16 Sq.mm	22-25 lbf.in	M6
100	M10	35-40Kgcm	50 Sq.mm	38-40 lbf.in	M6
120	M10	35-40Kgcm	50 Sq.mm	38-40 lbf.in	M6
150	M12	35-40Kgcm	50 Sq.mm	38-40 lbf.in	M6

Syntax

EF – 1B CCC X YY E – C11

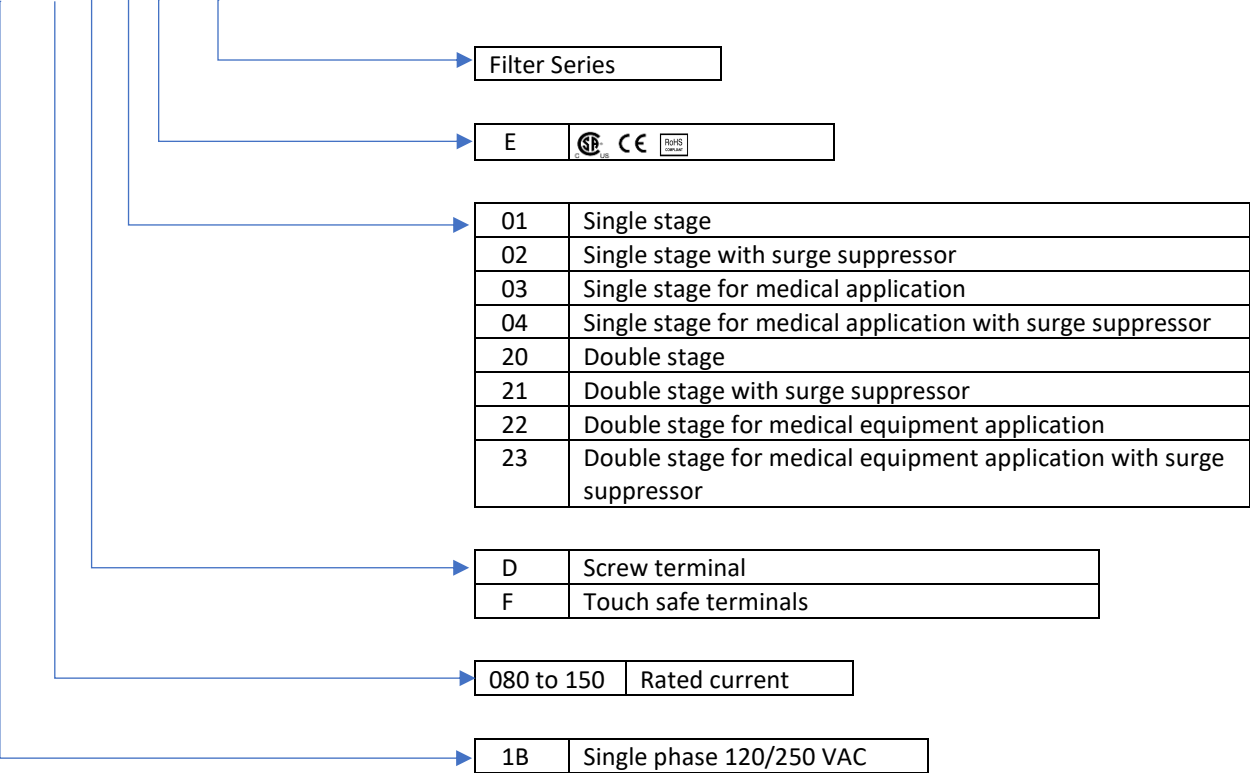

Datasheet | EC11 EP-612 series



REV	IS	WAS	DATE	SIGN	APP.

HQ: Elcom International Pvt. Ltd. 20, Prabhadevi Ind. Est., Mumbai - 400 025, India. Tel.: +91 22 66114444, Fax: +91 22 66114422, sales@elcom-in.com

www.elcom-in.com

Prepared on: 22.08.22

F: ENG-40.00

Copyright © 2022 by Elcom International Pvt.Ltd, India. All rights reserved

The content of this document has been carefully checked and understood. However, Elcom not assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer.

Elcom International Pvt Ltd

20, Ground Floor, Prabhadevi Industrial Estate, 408, Veer Savarkar Marg,
Prabhadevi, Mumbai, Maharashtra - 400025, India.

Landline - +91-22-66114444 / +91-22-24308861

Email ID: elcom.mail@elcom-in.com

Factory:

Plot E-4, MIDC, Kagal-Hatkanangale Five Star Industrial Area,
Kasba:Sangaon, Kolhapur, Maharashtra, India – 416236

