

This Drawing and contents there on are the property of ebm-papst India Pvt Ltd . It is to be used only for the purpose for which it was expressly loaned and it is not to be copied in any manner, nor any information taken therefrom to be transmitted or passed on to others. THIS PRINT IS TO BE RETURNED UPON REQUEST OR COMPLETION OF THE WORK FOR WHICH IT WAS ISSUED.

A

A

B

B

C

C

D



D

E

E

F

F

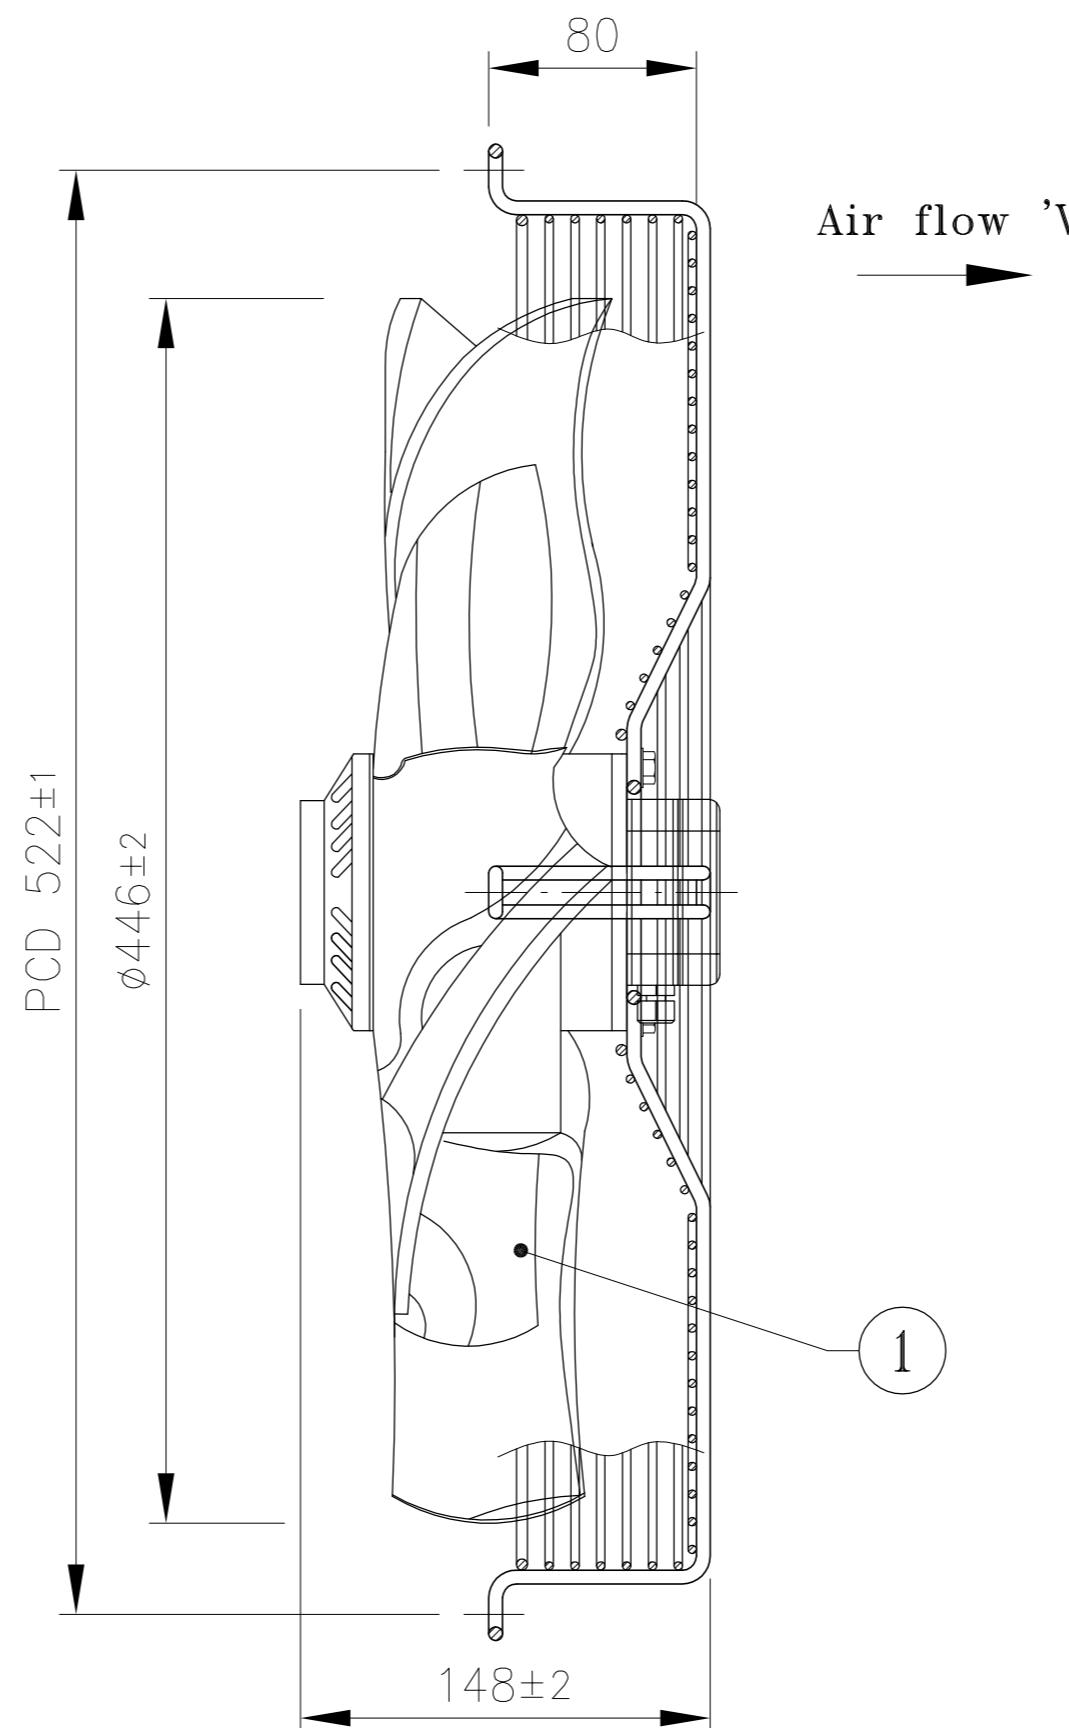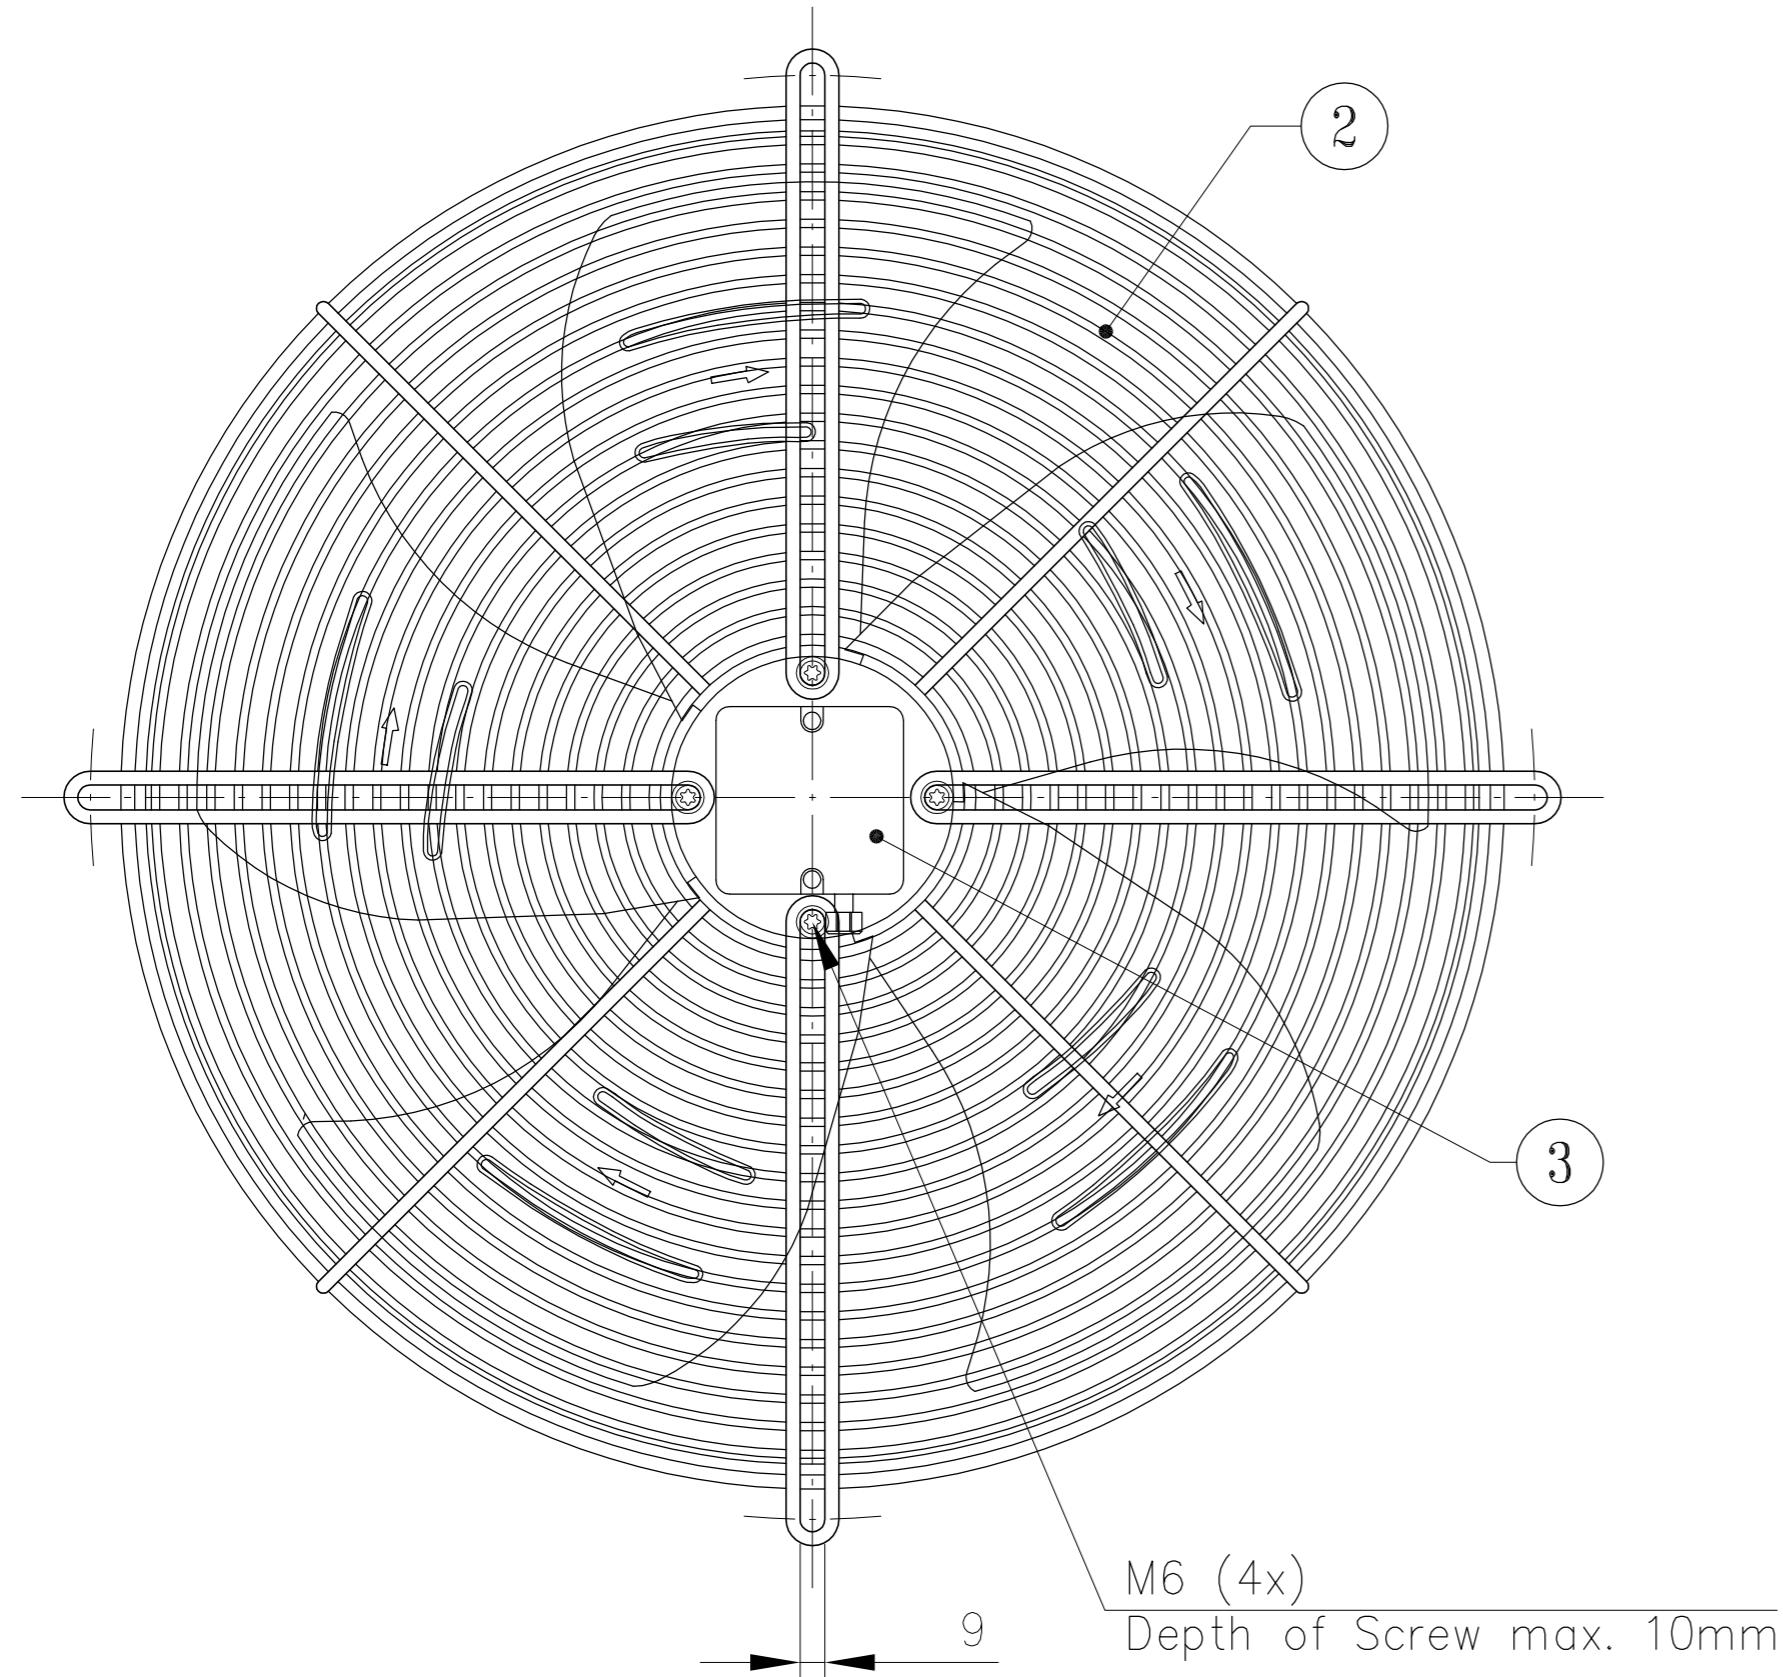

Technical Specification	
Motor	M4E074-EI
Nominal voltage	1~230 VAC
Frequency	50 Hz
Speed	1350 rpm
Power input	225 W
Current draw	1.0 A
Airflow(At 0 Pa)	5415 CMH
Perm.amb.temp.	-40 to +60°C
Max.back pressure	60 Pa
Type of protection	IP44
Insulation class	'F'
Capacitor	6.0µF400VDB
Motor bearing	Antifreeze ball bearing

TOLERANCES IS 2102 'c'	ebm papst ebm-papst India Private Limited			Approved
				Checked
CLIENT	TITLE	Drawn Senthil Date 05.11.15		
INNOCOOL	Remove all burrs and Sharp Edges.			
MATL.	DRG. No.	Revision		SCALE NTS
	S4E450AQ0509(IN)		Date	
	All dimensions are in 'mm' unless otherwise specified			