


FORK TONGUE TERMINAL

With insulation grip

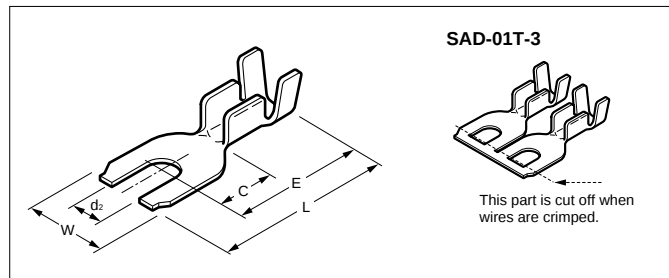


UL Listed E42024

SP Certified LR20812

Model No.	Standard	Applicable wire			Material	Finish	Dimensions mm(in.)						Q'ty / reel
		mm ²	AWG #	Insulation O.D. mm(in.)			d ₂ (dia.)	E	L	C	W	Material thickness	
SAA-51-3	UL SP	0.5 to 2.0	20 to 14	2.6 to 3.8 (.102 to .150)	Brass	—	3.2 (.126)	13.0 (.512)	16.8 (.661)	5.8 (.228)	7.2 (.283)	0.5 (.020)	7,500
SAA-51T-3						Tin-plated	3.7 (.146)						
SAA-51-3.7						—	4.3 (.169)						
SAA-51T-3.7						Tin-plated	5.3 (.209)						
SAA-51-4						—	3.2 (.126)				8.2 (.323)		5,000
SAA-51T-4						Tin-plated	11.0 (.433)				6.3 (.248)		5,000
SAB-51-5	UL SP	0.2 to 0.5	24 to 20	Approx 2.0 (.079)	Brass	—	3.2 (.126)	11.0 (.433)	14.7 (.579)	5.2 (.205)	6.3 (.248)	0.5 (.020)	5,000
SAB-51T-5						Tin/lead-plated	3.2 (.126)						
*SAD-01T-3	UL SP	0.2 to 0.5	24 to 20	Approx 2.0 (.079)	Brass	Tin/lead-plated	3.2 (.126)	11.0 (.433)	14.7 (.579)	5.2 (.205)	6.3 (.248)	0.5 (.020)	5,000

Note: The terminal denoted by * is a twin lead fork terminal and is used for crimping 2 piece terminals simultaneously onto 2 parallel wires like the TV feeder wires.

Without insulation grip

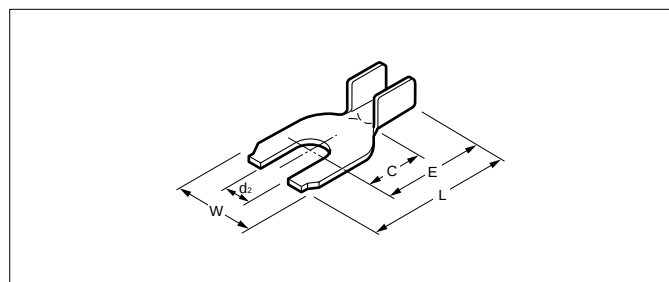


UL Listed E42024

SP Certified LR20812

Model No.	Standard	Applicable wire		Material	Finish	Dimensions mm(in.)						Q'ty / reel
		mm ²	AWG #			d ₂ (dia.)	E	L	C	W	Material thickness	
SAA-50-3	UL SP	0.5 to 2.0	20 to 14	Brass	—	3.2 (.126)	10.0 (.394)	13.8 (.543)	6.0 (.236)	7.2 (.283)	0.5 (.020)	10,000
SAA-50T-3					Tin-plated	3.7 (.146)						
SAA-50-3.7					—	4.3 (.169)						
SAA-50T-3.7					Tin-plated	5.3 (.209)						
SAA-50-4					—	3.2 (.126)						
SAA-50T-4					Tin-plated	11.0 (.433)						

FORK TONGUE TERMINAL

Locking type (With insulation grip)-----

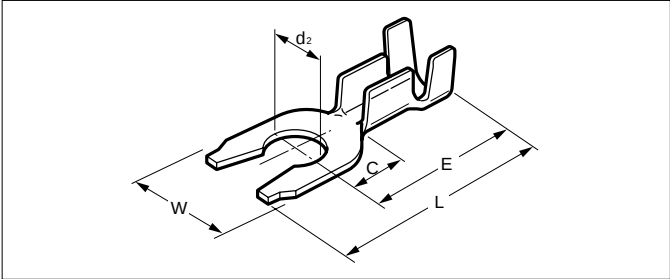

UL Listed E42024 SPS Certified LR20812

Model No.	Standard	Applicable wire			Material	Finish	Dimensions mm(in.)						Q'ty / reel
		mm²	AWG #	Insulation O.D. mm(in.)			d₂ (dia.)	E	L	C	W	Material thickness	
SAA-21-3L	UL SPS	0.3 to 0.75	22 to 18	1.5 to 2.8 (.059 to .110)	Brass	—	3.2 (.126)	13.0 (.512)	16.8 (.661)	5.8 (.228)	7.2 (.283)	0.5 (.020)	7,500
SAA-21T-3L						Tin-plated	3.7 (.146)						
SAA-21-3.5L						—	4.3 (.169)						
SAA-21T-3.5L						Tin-plated	4.3 (.169)						
SAA-21-4L						—	4.3 (.169)						
SAA-21T-4L						Tin-plated	4.3 (.169)						

Applicator for the semi-automatic press AP-K2N -----

Contact	Crimp applicator MK-L	
	with safety cover	without safety cover
SAA-21(T)-**	APLMK SAA21	APLNC SAA21
SAA-50(T)-**	APLMK SAA50	APLNC SAA50
SAA-51(T)-**	APLMK SAA51	APLNC SAA51
SAB-51(T)-**	APLMK SAB51	APLNC SAB51
SAD-01T-**	APLMK SAD01	APLNC SAD01

* Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.
* Contact JST for details.