


30W isolated DC-DC converter
Ultra-wide input and regulated dual/single output

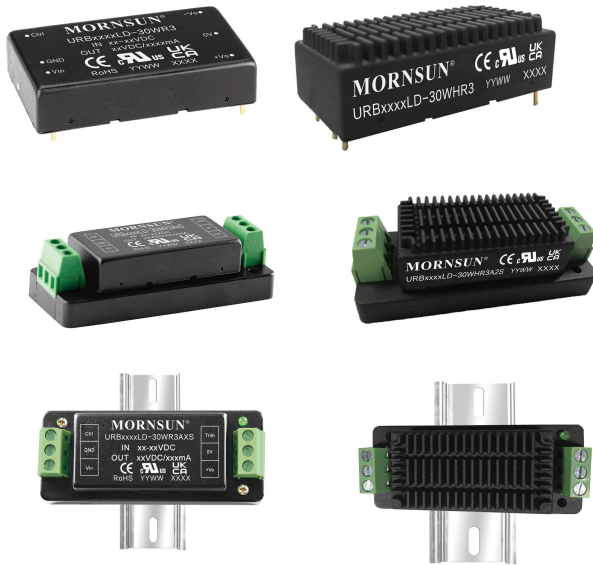

UL **CE** **UK** **CB** Report Patent Protection **RoHS**
UL60950-1 EN62368-1 BS EN62368-1 IEC60950-1

FEATURES

- Ultra-wide 4:1 input voltage range
- High efficiency up to 90% with full load
- High efficiency up to 82% with 5% load
- No-load power consumption as low as 0.14W
- I/O isolation test voltage 1.5k VDC
- Input under-voltage protection, output short-circuit, over-voltage, over-current protection
- Operating ambient temperature range: -40°C to +80°C
- Meets CISPR32/EN55032 CLASS A without extra components
- Six-sided metal shielded package
- Input reverse polarity protection available with chassis(A2S) or Din-Rail mounting (A4S) version

URA_LD-30WR3 & URB_LD-30WR3 series of isolated 30W DC-DC converter products with an ultra-wide 4:1 input voltage and feature efficiencies of up to 90%, input to output isolation is tested with 1500VDC and the converters safely operate ambient temperature of -40°C to +80°C, input under-voltage protection, output short-circuit, over-voltage, over-current protection. They meet CLASS A of CISPR32/EN55032 EMI standards without external components, optional packages are offered for chassis or DIN-rail mounting (A2S, A4S), adding additional input reverse polarity protection and they are widely used in applications such as data transmission device, battery power supply device, telecommunication device, distributed power supply system, hybrid module system, remote control system, industrial robot and railway fields.

Selection Guide

| Certification | Part No. ① | Input Voltage (VDC) | | Output | | Full Load Efficiency ② (%) Min./Typ. | Capacitive Load ③ (μF)Max. |
|--------------------|-----------------|---------------------|--------|---------------|------------------------|--------------------------------------|----------------------------|
| | | Nominal ② (Range) | Max. ③ | Voltage (VDC) | Current (mA) Max./Min. | | |
| UL/EN/BS EN/IEC | URB2403LD-30WR3 | 24 (9-36) | 40 | 3.3 | 6000/0 | 83/85 | 10000 |
| | URB2405LD-30WR3 | | | 5 | 6000/0 | 84/86 | 10000 |
| | URB2409LD-30WR3 | | | 9 | 3333/0 | 86/88 | 4700 |
| | URB2412LD-30WR3 | | | 12 | 2500/0 | 88/90 | 2700 |
| | URB2415LD-30WR3 | | | 15 | 2000/0 | 88/90 | 1680 |
| | URB2424LD-30WR3 | | | 24 | 1250/0 | 88/90 | 680 |
| EN | URA2405LD-30WR3 | | | ±5 | ±3000/0 | 84/86 | 2000 |
| | URA2412LD-30WR3 | | | ±12 | ±1250/0 | 87/89 | 1250 |
| | URA2415LD-30WR3 | | | ±15 | ±1000/0 | 87/89 | 680 |
| | URA2424LD-30WR3 | | | ±24 | ±625/0 | 87/89 | 470 |
| UL/EN/BS EN/IEC | URB4803LD-30WR3 | 48 (18-75) | 80 | 3.3 | 6000/0 | 84/86 | 10000 |
| | URB4805LD-30WR3 | | | 5 | 6000/0 | 85/87 | 10000 |
| | URB4812LD-30WR3 | | | 12 | 2500/0 | 86/88 | 2700 |
| | URB4815LD-30WR3 | | | 15 | 2000/0 | 87/89 | 1680 |
| | URB4824LD-30WR3 | | | 24 | 1250/0 | 85/87 | 680 |
| EN | URA4805LD-30WR3 | | | ±5 | ±3000/0 | 84/86 | 2000 |
| | URA4812LD-30WR3 | | | ±12 | ±1250/0 | 86/88 | 1250 |
| | URA4815LD-30WR3 | | | ±15 | ±1000/0 | 86/88 | 680 |

Notes:
① Use "H" suffix for heat sink mounting, "A2S" suffix for chassis mounting and "A4S" suffix for DIN-Rail mounting. We recommend to choose modules with a heat sink for enhanced heat dissipation and applications with extreme temperature requirements;

- ②The minimum input voltage and starting voltage of A2S and A4S Model are 1VDC higher than those of DIP package due to input reverse polarity protection function;
- ③Exceeding the maximum input voltage may cause permanent damage;
- ④Efficiency is measured at nominal input voltage and rated output load; efficiencies for A2S and A4S Model's is decreased by 2% due to the input reverse polarity protection circuit;
- ⑤The specified maximum capacitive load for positive and negative output is identical.

Input Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit | |
|-------------------------------------|---|--|------|---------|----------|----|
| Input Current (full load / no-load) | 24VDC nominal input series, nominal input voltage | 3.3V output | -- | 971/60 | 994/100 | mA |
| | | 5V output | -- | 1453/60 | 1488/100 | |
| | | Others | -- | 1420/6 | 1488/16 | |
| | 48VDC nominal input series, nominal input voltage | 3.3V output | -- | 480/20 | 491/30 | |
| | | 5V output | -- | 718/20 | 735/35 | |
| | | Others | -- | 710/5 | 744/10 | |
| Reflected Ripple Current | Nominal input voltage | -- | 40 | -- | | |
| Surge Voltage (1sec. max.) | 24VDC nominal input series | -0.7 | -- | 50 | VDC | |
| | 48VDC nominal input series | -0.7 | -- | 100 | | |
| Start-up Voltage | 24VDC nominal input series | -- | -- | 9 | | |
| | 48VDC nominal input series | -- | -- | 18 | | |
| Input Under-voltage Protection | 24VDC nominal input series | 5.5 | 6.5 | -- | | |
| | 48VDC nominal input series | 12.0 | 15.5 | -- | | |
| Start-up Time | Nominal input voltage & constant resistance load | -- | 10 | -- | ms | |
| Input Filter | | PI filter | | | | |
| Hot Plug | | Unavailable | | | | |
| Ctrl * | Module on | Ctrl pin open or pulled high (3.5-12VDC) | | | | |
| | Module off | Ctrl pin pulled low to GND (0-1.2VDC) | | | | |
| | Input current when off | -- | 5 | 8 | mA | |

Note: *The Ctrl pin voltage is referenced to input GND.

Output Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit | |
|------------------------------|---|-----------------------------------|------|-------|------|-------|
| Voltage Accuracy | 5%-100% load | -- | ±1 | ±3 | % | |
| | 0%-5% load | -- | ±1 | ±5 | | |
| Linear Regulation | Input voltage variation from low to high at full load | Vo1 | -- | ±0.2 | | ±0.5 |
| | | Vo2 | -- | ±0.5 | | ±1 |
| Load Regulation ^① | 5%-100% load | Vo1 | -- | ±0.5 | | ±1 |
| | | Vo2 | -- | ±0.5 | | ±1.5 |
| Cross Regulation | Dual output, Vo1 load at 50%, Vo2 load at range of 10%-100% | -- | -- | ±5 | | |
| Transient Recovery Time | 25% load step change, nominal input voltage | -- | 300 | 500 | μs | |
| Transient Response Deviation | 25% load step change, nominal input voltage | 3.3V/5V/±5V output | -- | ±5 | ±8 | % |
| | | Others | -- | ±3 | ±5 | |
| Temperature Coefficient | Full load | -- | -- | ±0.03 | %/°C | |
| Ripple & Noise ^② | 20MHz bandwidth, nominal input voltage, 100% load | Singe output | -- | 50 | 100 | mVp-p |
| | | Dual output | -- | 50 | 150 | |
| Trim | Input voltage range | -- | ±10 | -- | %Vo | |
| Over-voltage Protection | | 110 | -- | 160 | | |
| Over-current Protection | | 110 | -- | 190 | %Io | |
| Short-circuit Protection | | Hiccup, continuous, self-recovery | | | | |

Note:

- ① Load regulation for 0%-100% load is $\pm 5\%$;
- ② The "parallel cable" method is used for ripple and noise test, please refer to *DC-DC Converter Application Notes* for specific information.

General Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------------|---|-----------------------------------|------|------|------------|
| Isolation | Input-output Electric Strength test for 1 minute with a leakage current of 1mA max. | 1500 | -- | -- | VDC |
| Insulation Resistance | Input-output resistance at 500VDC/60sec | 1000 | -- | -- | M Ω |
| Isolation Capacitance | Input-output capacitance at 100kHz/0.1V | -- | 2000 | -- | pF |
| Operating Temperature | See Fig. 1, Fig. 2, Fig. 3 and Fig. 4 | -40 | -- | +80 | °C |
| Storage Temperature | | -55 | -- | +125 | |
| Storage Humidity | Non-condensing | 5 | -- | 95 | %RH |
| Pin Soldering Resistance Temperature | Soldering spot is 1.5mm away from case for 10 seconds | -- | -- | +300 | °C |
| Vibration | | IEC/EN61373 - Category 1, Grade B | | | |
| Switching Frequency * | PWM mode | -- | 300 | -- | kHz |
| MTBF | MIL-HDBK-217F@25°C | 1000 | -- | -- | k hours |

Note:* Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.

Mechanical Specifications

| | | | | | |
|----------------|---|---|--------------------------|--|--|
| Case Material | Aluminum alloy | | | | |
| Dimensions | Horizontal package (without heat sink) | | 50.80 x 25.40 x 11.80 mm | | |
| | Horizontal package (with heat sink) | | 51.40 x 26.20 x 16.50 mm | | |
| | A2S chassis mounting (without heat sink) | | 76.00 x 31.50 x 21.20 mm | | |
| | A2S chassis mounting (with heat sink) | | 76.00 x 31.50 x 25.30 mm | | |
| | A4S Din-rail mounting (without heat sink) | | 76.00 x 31.50 x 25.80 mm | | |
| | A4S Din-rail mounting (with heat sink) | | 76.00 x 31.50 x 29.90 mm | | |
| Weight | Without heat sink | Horizontal package/A2S chassis mounting/A4S Din-rail mounting | 27.8g/52.0g/72.0g(Typ.) | | |
| | With heat sink | Horizontal package/A2S chassis mounting/A4S Din-rail mounting | 37.0g/60.0g/80.0g(Typ.) | | |
| Cooling Method | Free air convection | | | | |

Electromagnetic Compatibility (EMC)

| | | | | | |
|-----------|-------|---------------|-----------------|---|------------------|
| Emissions | CE | Single output | CISPR32/EN55032 | CLASS A (without external components)/ CLASS B (see Fig.6-② for recommended circuit) | |
| | | Dual output | CISPR32/EN55032 | CLASS A (without external components)/ CLASS B (see Fig.7-② for recommended circuit) | |
| | RE | Single output | CISPR32/EN55032 | CLASS A (without external components)/ CLASS B (see Fig.6-② for recommended circuit) | |
| | | Dual output | CISPR32/EN55032 | CLASS A (without external components)/ CLASS B (see Fig.7-② for recommended circuit) | |
| Immunity | ESD | | IEC/EN61000-4-2 | Contact $\pm 4kV$ | perf. Criteria B |
| | RS | | IEC/EN61000-4-3 | 10V/m | perf. Criteria A |
| | EFT | Single output | IEC/EN61000-4-4 | $\pm 2kV$ (see Fig.6-① for recommended circuit) | perf. Criteria B |
| | | Dual output | IEC/EN61000-4-4 | $\pm 2kV$ (see Fig.7-① for recommended circuit) | perf. Criteria B |
| | Surge | Single output | IEC/EN61000-4-5 | line to line $\pm 2kV$ (see Fig.6-① for recommended circuit) | perf. Criteria B |
| | | Dual output | IEC/EN61000-4-5 | line to line $\pm 2kV$ (see Fig.7-① for recommended circuit) | perf. Criteria B |
| | CS | Single output | IEC/EN61000-4-6 | 3 Vr.m.s | perf. Criteria A |
| | | Dual output | IEC/EN61000-4-6 | 10Vr.m.s | perf. Criteria A |

Electromagnetic Compatibility (EMC) (EN50155)

| | | | | | |
|-----------|----|---------------|-------------|---------------|--|
| Emissions | CE | Single output | EN50121-3-2 | 150kHz-500kHz | 99dB μ V (see Fig.6-② for recommended circuit) |
| | | | EN55016-2-1 | 500kHz-30MHz | 93dB μ V (see Fig.6-② for recommended circuit) |
| | | Dual output | EN50121-3-2 | 150kHz-500kHz | 99dB μ V (see Fig.7-② for recommended circuit) |

| | | | | | | |
|-----------|-------|---------------|-------------|--|---|------------------|
| | | | EN55016-2-1 | 500kHz-30MHz | 93dB μ V (see Fig.7-② for recommended circuit) | |
| Emissions | RE | Single output | EN50121-3-2 | 30MHz-230MHz | 40dB μ V/m at 10m (see Fig.6-② for recommended circuit) | |
| | | | EN55016-2-1 | 230MHz-1GHz | 47dB μ V/m at 10m (see Fig.6-② for recommended circuit) | |
| Emissions | RE | Dual output | EN50121-3-2 | 30MHz-230MHz | 40dB μ V/m at 10m (see Fig.7-② for recommended circuit) | |
| | | | EN55016-2-1 | 230MHz-1GHz | 47dB μ V/m at 10m (see Fig.7-② for recommended circuit) | |
| Immunity | ESD | | EN50121-3-2 | Contact \pm 6kV/Air \pm 8kV | perf. Criteria A | |
| | RS | | EN50121-3-2 | 20V/m | perf. Criteria A | |
| | EFT | Single output | EN50121-3-2 | \pm 2kV 5/50ns 5kHz | (see Fig.6-① for recommended circuit) | perf. Criteria A |
| | | Dual output | EN50121-3-2 | \pm 2kV 5/50ns 5kHz | (see Fig.7-① for recommended circuit) | perf. Criteria A |
| | Surge | Single output | EN50121-3-2 | line to line \pm 1kV (42 Ω , 0.5 μ F) | (see Fig.6-① for recommended circuit) | perf. Criteria A |
| | | Dual output | EN50121-3-2 | line to line \pm 1kV (42 Ω , 0.5 μ F) | (see Fig.7-① for recommended circuit) | perf. Criteria A |
| | CS | Single output | EN50121-3-2 | 0.15MHz-80MHz | 10V r.m.s | perf. Criteria A |
| | | Dual output | EN50121-3-2 | 0.15MHz-80MHz | 10V r.m.s | perf. Criteria A |

Typical Characteristic Curves

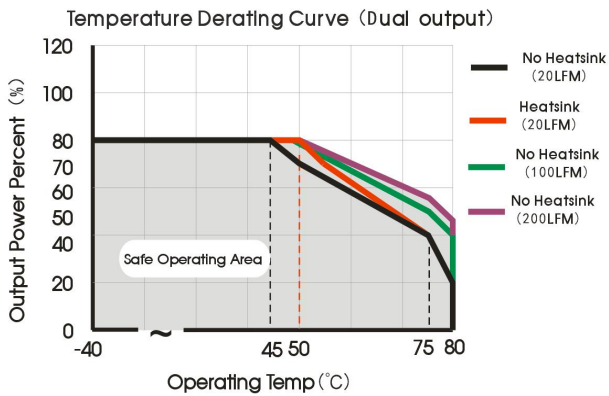


Fig. 1

Applicable models: URA2405LD-30W(H)R3 (9-18V input voltage), URA2424LD-30W(H)R3 (9-18V input voltage), URA4805LD-30W(H)R3 (18-36V input voltage)

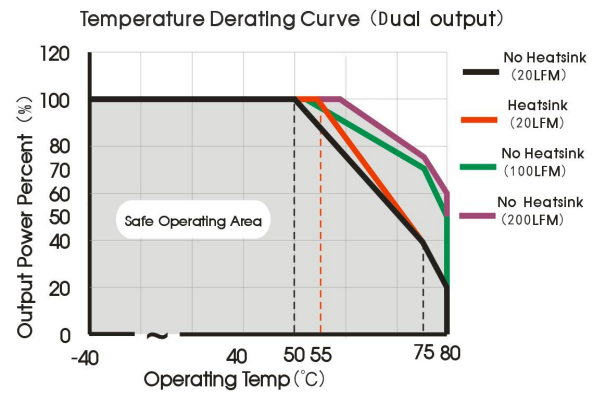


Fig. 2

Applicable models: URA2405LD-30W(H)R3 (18-36V input voltage), URA2424LD-30W(H)R3 (18-36V input voltage), URA4805LD-30W(H)R3 (36-75V input voltage), URA2412LD-30W(H)R3, URA2415LD-30W(H)R3, URA4812LD-30W(H)R3, URA4815LD-30W(H)R3

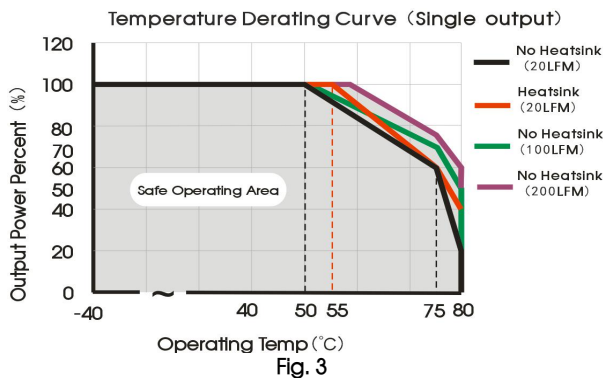


Fig. 3

Applicable models: URB2403LD-30W(H)R3, URB2405LD-30W(H)R3, URB4803LD-30W(H)R3, URB4805LD-30W(H)R3





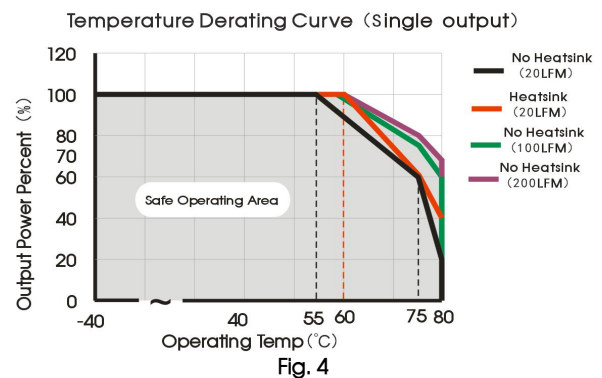


Fig. 4

Applicable models: URB2409LD-30W(H)R3, URB2412LD-30W(H)R3, URB2415LD-30W(H)R3, URB2424LD-30W(H)R3, URB4812LD-30W(H)R3, URB4815LD-30W(H)R3, URB4824LD-30W(H)R3

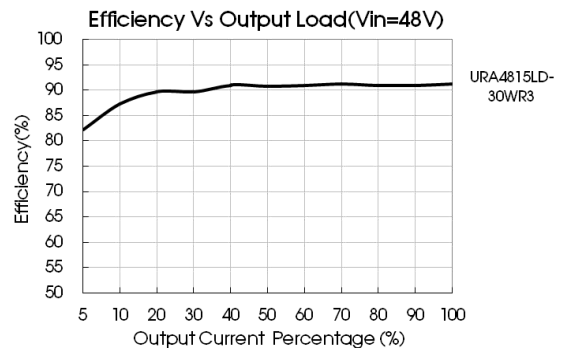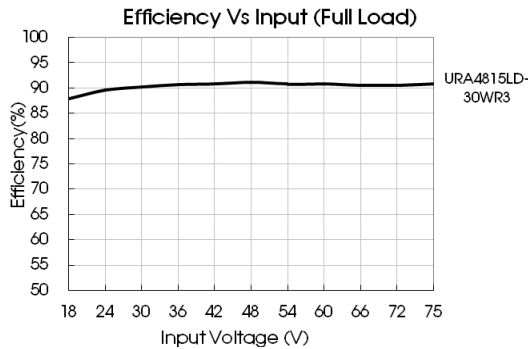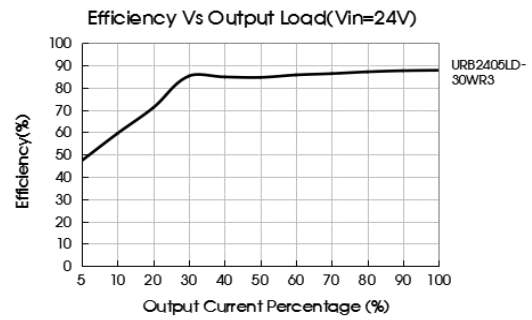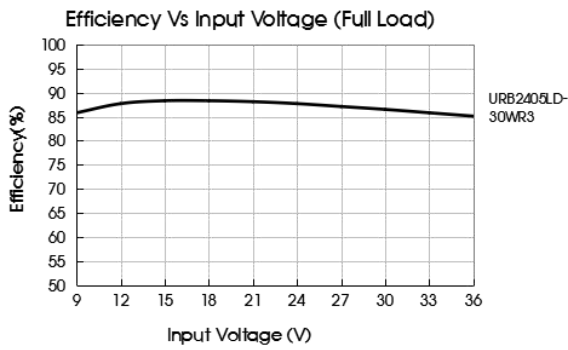

Design Reference

1. Typical application

All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 5.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

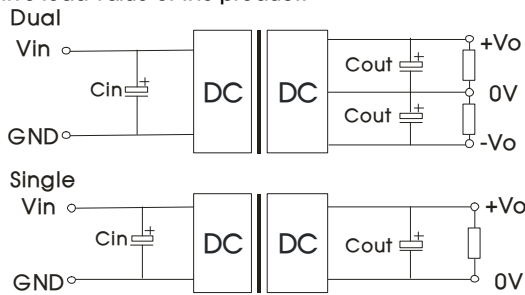


Fig. 5

| Single output voltage (VDC) | C_{out} (μF) | C_{in} (μF) | Dual output voltage (VDC) | C_{out} (μF) | C_{in} (μF) |
|-----------------------------|-----------------------|----------------------|---------------------------|-----------------------|----------------------|
| 3.3/5/9 | 220 | 100 | $\pm 5/\pm 12/\pm 15$ | 220 | 100 |
| 12/15/24 | 100 | | ± 24 | 100 | |

2. EMC compliance circuit

Single output:

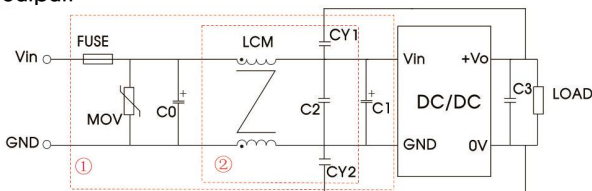


Fig. 6

Notes: We use Part ① in Fig. 6 for immunity and part ② for emissions test. Selecting based on needs.

Parameter description:

| Model | Vin:24VDC | Vin:48VDC |
|---------|---|-------------------|
| FUSE | Choose according to actual input current | |
| MOV | S20K30 | S14K60 |
| C0 | 680 μF /50V | 330 μF /100V |
| C1 | 330 μF /50V | 330 μF /100V |
| C2 | 4.7 μF /50V | 2.2 μF /100V |
| C3 | Refer to the C_{out} in Fig.5 | |
| LCM | 1mH, recommended to use MORNSUN's FL2D-30-102 | |
| CY1/CY2 | 1nF/2kV | |

Dual output:


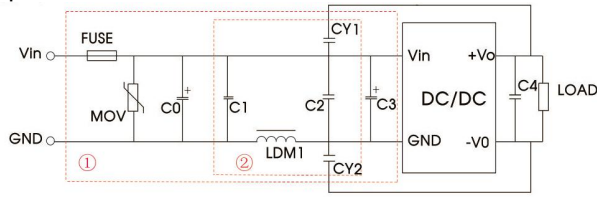


Fig.7

Notes: We use Part ① in Fig. 7 for immunity and part ② for emissions test.
Selecting based on needs.

| Model | Vin:24VDC | Vin:48VDC |
|---------|--|------------|
| FUSE | Choose according to actual input current | |
| MOV | S20K30 | S14K60 |
| C0 | 680µF/50V | 330µF/100V |
| C1/C2 | 2.2µF/50V | 2.2µF/100V |
| C3 | 330µF/50V | 330µF/100V |
| C4 | Refer to the Cout in Fig.5 | |
| LDM1 | 3.3µH | |
| CY1/CY2 | 2.2nF/400VAC Safety Y Capacitor | |

3. Trim Function for Output Voltage Adjustment (open if unused)

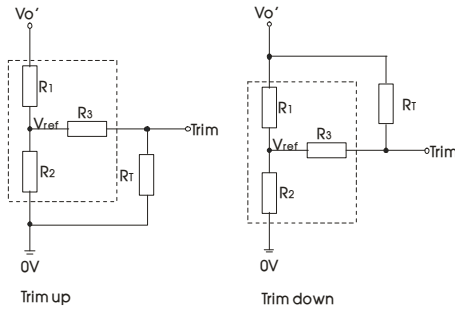

Calculating Trim resistor values:

$$\text{up: } R_T = \frac{\alpha R_2}{R_2 - \alpha} - R_3 \quad \alpha = \frac{V_{ref}}{V_{o'} - V_{ref}} \cdot R_1$$

$$\text{down: } R_T = \frac{\alpha R_1}{R_1 - \alpha} - R_3 \quad \alpha = \frac{V_{o'} - V_{ref}}{V_{ref}} \cdot R_2$$

R_T = Trim Resistor value
 α = self-defined parameter
 $V_{o'}$ = desired output voltage


TRIM resistor connection (dashed line shows internal resistor network)

| Vout(VDC) | R1(kΩ) | R2(kΩ) | R3(kΩ) | Vref(V) |
|-----------|--------|--------|--------|---------|
| 3.3 | 4.801 | 2.87 | 12.4 | 1.24 |
| 5 | 2.883 | 2.87 | 10 | 2.5 |
| 9 | 7.500 | 2.87 | 15 | 2.5 |
| 12 | 11.000 | 2.87 | 15 | 2.5 |
| 15 | 14.494 | 2.87 | 15 | 2.5 |
| 24 | 24.872 | 2.87 | 17.8 | 2.5 |


4. The products do not support parallel connection of their output

5. For additional information please refer to DC-DC converter application notes on www.mornsun-power.com

Horizontal Package (without heat sink) Dimensions and Recommended Layout

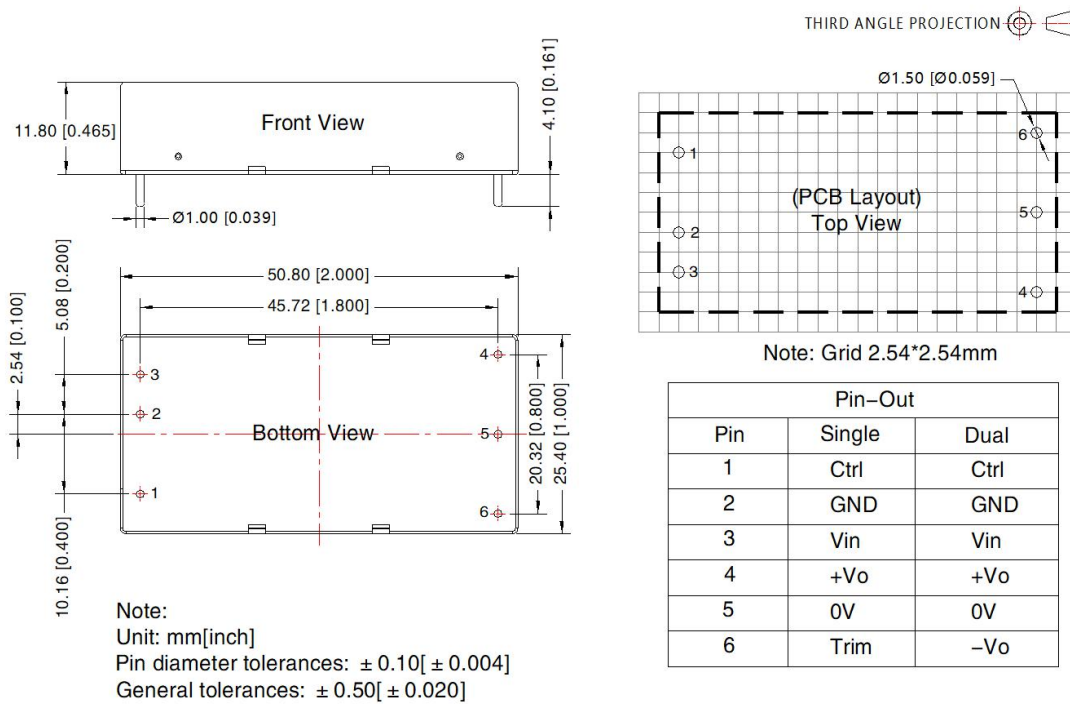


Horizontal Package (with heat sink) Dimensions

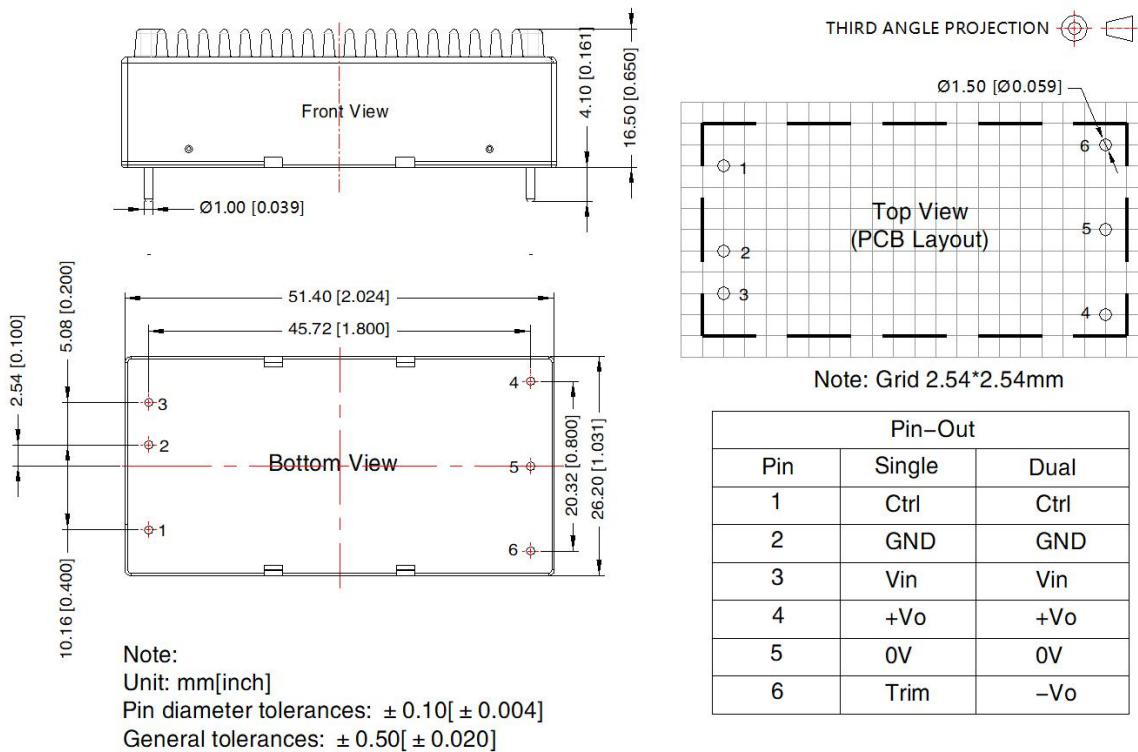


URA_LD-30WR3A2S & URB_LD-30WR3A2S(without heat sink) Dimensions

THIRD ANGLE PROJECTION

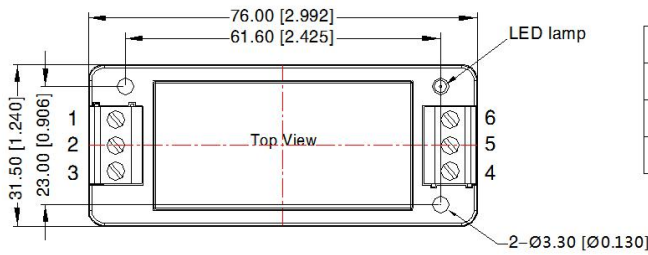


| Pin-Out | | | | | | |
|---------|------|-----|-----|-----|----|------|
| Pin | 1 | 2 | 3 | 4 | 5 | 6 |
| Single | Ctrl | GND | Vin | +Vo | 0V | Trim |
| Dual | Ctrl | GND | Vin | +Vo | 0V | -Vo |

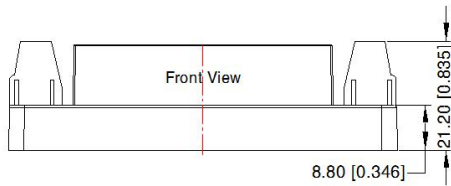


Note:
Unit: mm[inch]
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N·m
General tolerances: ± 1.00 [± 0.039]

URA_LD-30WHR3A2S & URB_LD-30WHR3A2S(with heat sink) Dimensions

THIRD ANGLE PROJECTION

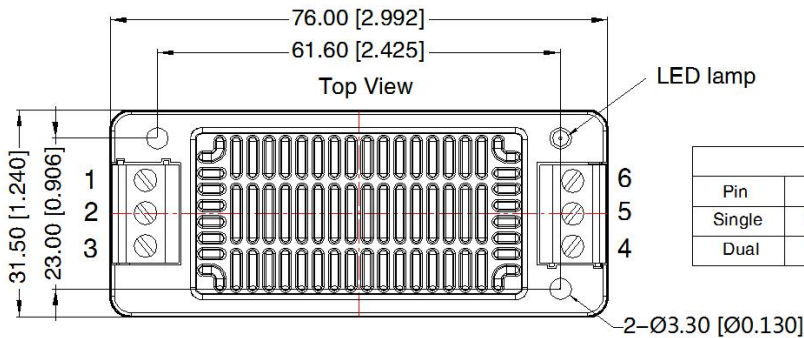


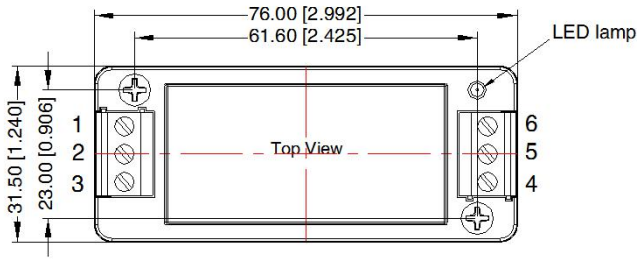
| Pin-Out | | | | | | |
|---------|------|-----|-----|-----|----|------|
| Pin | 1 | 2 | 3 | 4 | 5 | 6 |
| Single | Ctrl | GND | Vin | +Vo | 0V | Trim |
| Dual | Ctrl | GND | Vin | +Vo | 0V | -Vo |

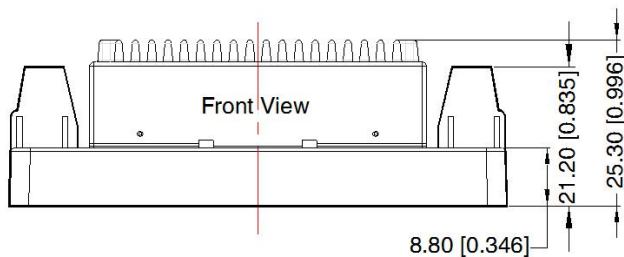


Note:
Unit: mm[inch]
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N · m
General tolerances: ± 1.00 [± 0.039]

URA_LD-30WR3A4S & URB_LD-30WR3A4S(without heat sink) Dimensions

THIRD ANGLE PROJECTION 




| | | Pin-Out | | | | | |
|--------|--|---------|-----|-----|-----|----|------|
| Pin | | 1 | 2 | 3 | 4 | 5 | 6 |
| Single | | Ctrl | GND | Vin | +Vo | 0V | Trim |
| Dual | | Ctrl | GND | Vin | +Vo | 0V | -Vo |

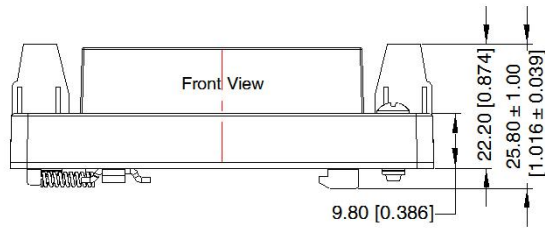


Note:
 Unit: mm[inch]
 Mounting rail: TS35
 Wire range: 24~12 AWG
 Tightening torque: Max 0.4 N·m
 General tolerances: ± 1.00 [± 0.039]

URA_LD-30WHR3A4S & URB_LD-30WHR3A4S(with heat sink) Dimensions

THIRD ANGLE PROJECTION 

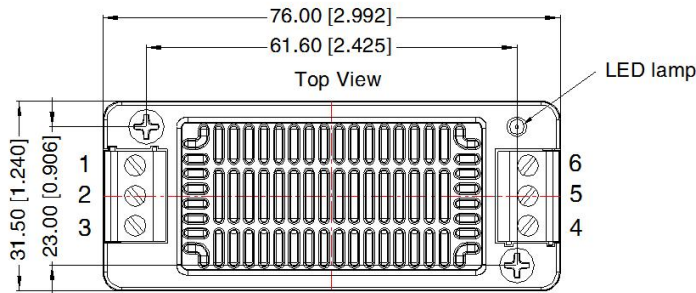

| | | Pin-Out | | | | | |
|--------|--|---------|-----|-----|-----|----|------|
| Pin | | 1 | 2 | 3 | 4 | 5 | 6 |
| Single | | Ctrl | GND | Vin | +Vo | 0V | Trim |
| Dual | | Ctrl | GND | Vin | +Vo | 0V | -Vo |

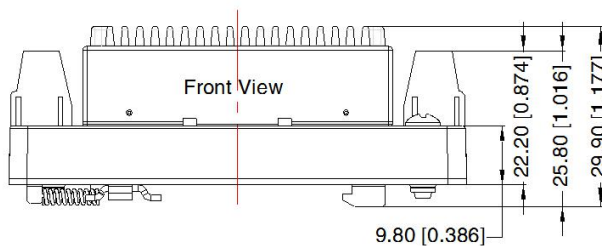

Note:
 Unit: mm[inch]
 Mounting rail: TS35
 Wire range: 24~12 AWG
 Tightening torque: Max 0.4 N·m
 General tolerances: ± 1.00 [± 0.039]

Notes:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Horizontal Packaging Bag Number: 58200035(without heat sink), 58200051(with heat sink), A2S/A4S Packaging Bag Number: 58220022;
2. The maximum capacitive load offered were tested at input voltage range and full load;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on company corporate standards;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com