

# Product data sheet

Specifications



## Inductive proximity sensors XS, inductive sensor XS4 M18, L48mm, PPS, Sn8mm, 12...24 VDC, M12

XS4P18PA340D

### Main

Range of product	Telemecanique Inductive proximity sensors XS
Series name	General purpose
Sensor type	Inductive proximity sensor
Sensor name	XS4
Sensor design	Cylindrical M18
Size	48 mm
Body type	Fixed
Detector flush mounting acceptance	Non flush mountable
Material	Plastic
Type of output signal	Discrete
Wiring technique	3-wire
[Sn] nominal sensing distance	8 mm
Discrete output function	1 NO
Output circuit type	DC
Discrete output type	PNP
Electrical connection	Male connector M12, 4 pins
[Us] rated supply voltage	12...24 V DC with reverse polarity protection
Switching capacity in mA	<= 200 mA DC with overload and short-circuit protection
IP degree of protection	IP67 conforming to IEC 60529

### Complementary

Thread type	M18 x 1
Detection face	Frontal
Front material	PPS
Enclosure material	PPS
Operating zone	0...6.4 mm
Differential travel	1...15% of Sr
Status LED	Output state: 1 LED (yellow)

<b>Supply voltage limits</b>	10...36 V DC
<b>Switching frequency</b>	<= 2000 Hz
<b>Maximum voltage drop</b>	<2 V (closed)
<b>Current consumption</b>	<= 10 mA no-load
<b>Maximum delay first up</b>	10 ms
<b>Maximum delay response</b>	0.15 ms
<b>Maximum delay recovery</b>	0.35 ms
<b>Marking</b>	CE
<b>Threaded length</b>	29 mm
<b>Height</b>	18 mm
<b>Length</b>	48 mm

## Environment

<b>Product certifications</b>	UL CSA
<b>Ambient air temperature for operation</b>	-25...70 °C
<b>Ambient air temperature for storage</b>	-40...85 °C
<b>Vibration resistance</b>	25 gn amplitude = +/- 2 mm (f = 10...55 Hz) conforming to IEC 60068-2-6
<b>Shock resistance</b>	50 gn for 11 ms conforming to IEC 60068-2-27

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	4.1 cm
<b>Package 1 Width</b>	9.5 cm
<b>Package 1 Length</b>	6.5 cm
<b>Package 1 Weight</b>	28 g
<b>Unit Type of Package 2</b>	S02
<b>Number of Units in Package 2</b>	44
<b>Package 2 Height</b>	15 cm
<b>Package 2 Width</b>	30 cm
<b>Package 2 Length</b>	40 cm
<b>Package 2 Weight</b>	1.543 kg

## Offer Sustainability


<b>Sustainable offer status</b>	Green Premium product
<b>REACH Regulation</b>	<a href="#">REACH Declaration</a>
<b>EU RoHS Directive</b>	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
<b>Mercury free</b>	Yes
<b>RoHS exemption information</b>	<a href="#">Yes</a>
<b>Environmental Disclosure</b>	<a href="#">Product Environmental Profile</a>
<b>Circularity Profile</b>	<a href="#">End of Life Information</a>

**California proposition 65**

WARNING: This product can expose you to chemicals including: Diisooxy phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**Contractual warranty****Warranty**


18 months

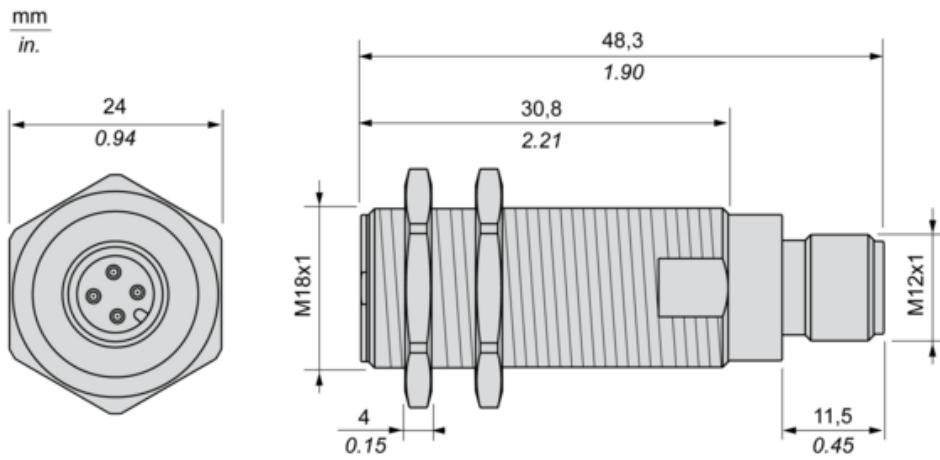**Dimensions**

### Minimum Mounting Distances


---

Side by side

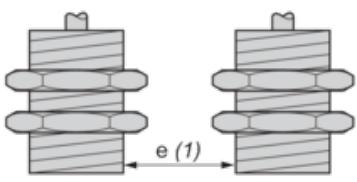


$e (1) \geq 32 \text{ mm/1.26 in.}$

Face to face

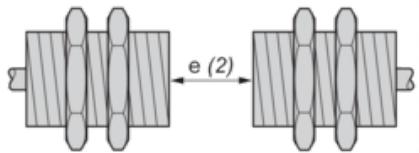


$e (2) \geq 96 \text{ mm/3.78 in.}$

Facing a metal object

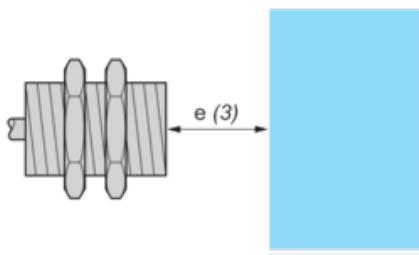

$e (3) \geq 24 \text{ mm/0.94 in.}$

Mounted in a metal support

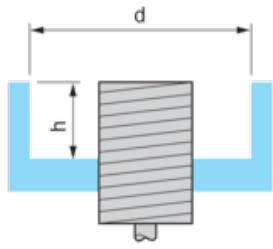


$d \geq 56 \text{ mm/2.20 in.}$


$h \geq 16 \text{ mm/0.63 in.}$


### Wiring Schemes

M12 connector



PNP

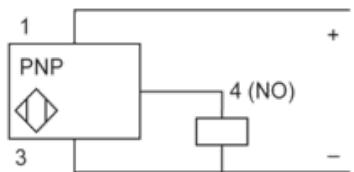

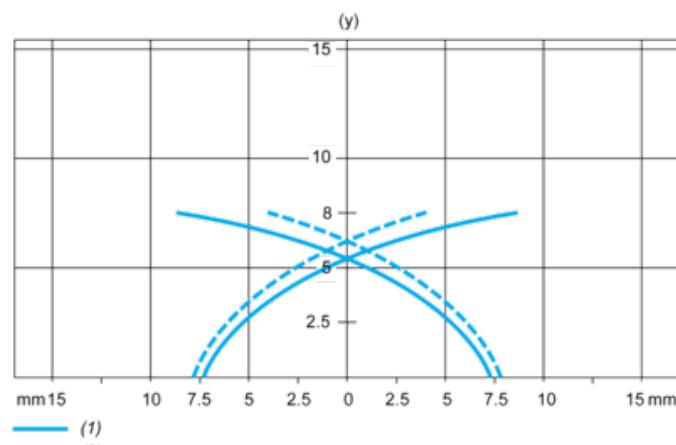**Performance Curves****Standard Steel Target : 24x24x1 mm**

(1) Pick-up points

(2) Drop-out points (object approaching from the side)

(y) Sensing distance in mm

**Recommended replacement(s)**