


Product data sheet

Specifications

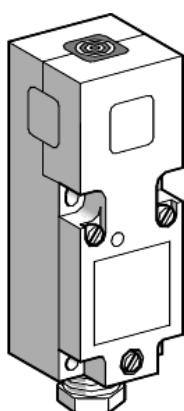

Inductive proximity sensor XSC - 20 mm - screw-clamp terminals

XSCH207629

- Discontinued on: 30 June 2014
- End-of-service on: 30 September 2014

(!) Discontinued

Main

Range of Product	Telemecanique Inductive proximity sensors XS
Series name	General purpose
Sensor Type	Inductive proximity sensor
Sensor name	XSC

Complementary

Body type	Fixed
Type of output signal	Discrete
Wiring Technique	2-wire
Electrical connection	Screw-clamp terminals
Cable entry	1 entry tapped for Pg 13.5 cable gland
Product Certifications	CCC
Ambient Air Temperature for Operation	-13...158 °F (-25...70 °C)
IP degree of protection	IP67

Ordering and shipping details

Category	22486-SENSORS, PROXIMITY
Discount Schedule	DS2
GTIN	00785901100591
Returnability	No
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Contractual warranty

Warranty	18 months
----------	-----------

Recommended replacement(s)

XSCH207629 is replaced by the following product range:



Inductive and capacitive sensors XS & XT

Inductive proximity OsiSense XS & capacitive proximity OsiSense XT

Products: 1107