

Product data sheet

Specifications



Photoelectric sensors XU, XUA, emitter, 12...24 VDC, cable 2 m

XUAH0203

Main

Range of product	Telemecanique Photoelectric sensors XU
Series name	Application assembly
Electronic sensor type	Photo-electric sensor transmitter
Sensor name	XUA
Sensor design	Cylindrical M8
Detection system	Thru beam
Material	Metal
Line of sight type	Axial
Supply circuit type	DC
Wiring technique	3-wire
Electrical connection	Cable
Cable length	2 m
Emission	Infrared thru beam
[Sn] nominal sensing distance	2 m thru beam need a receiver

Complementary

Enclosure material	Nickel plated brass
Lens material	PMMA
Add on input	Test by emission breaking
Cable composition	3 x 0.14 mm ²
Wire insulation material	PvR
Cable outer diameter	3.5 mm
[Us] rated supply voltage	12...24 V DC with reverse polarity protection
Supply voltage limits	10...30 V DC
Current consumption	<= 15 mA
Maximum delay first up	20 ms
Setting-up	Without sensitivity adjustment
Diameter	8 mm
Length	48 mm

Net weight	0.05 kg
------------	---------

Environment

Product certifications	CE cULus
Ambient air temperature for operation	-25...55 °C
Ambient air temperature for storage	-30...70 °C
Vibration resistance	7 gn, amplitude = +/- 1 mm (f = 10...55 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn (duration = 11 ms) conforming to IEC 60068-2-27
IP degree of protection	IP67 conforming to IEC 60529 IP65 conforming to IEC 60529

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.5 cm
Package 1 Width	6.7 cm
Package 1 Length	9.5 cm
Package 1 Weight	48.0 g
Unit Type of Package 2	S01
Number of Units in Package 2	24
Package 2 Height	15.0 cm
Package 2 Width	15.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	1.338 kg


Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
California proposition 65	WARNING: This product can expose you to chemicals including: Diisobutyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

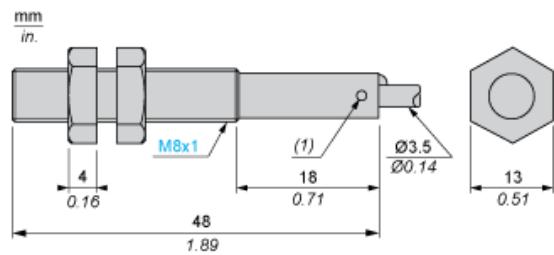


(1) LED, 4 viewing ports at 90°

Note : Fixing nut tightening torque : <2N.m

Wiring Schemes

Transmitter




BN : Brown

BU : Blue

VI : Violet

Beam Break Test

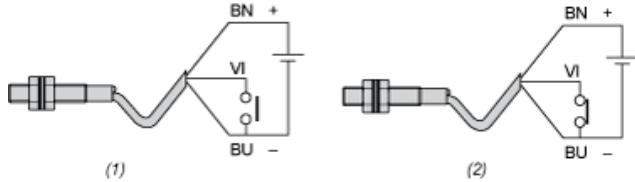

(1) Beam made LED on (steady light)


(2) Beam broken LED flashing

BN : Brown


BU : Blue

VI : Violet

Detection Curves

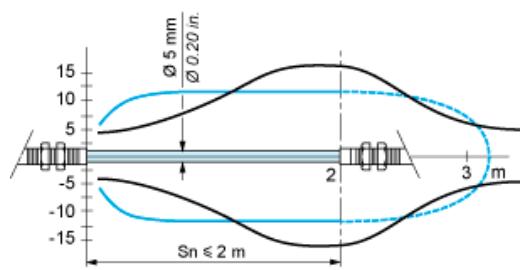

Excess Gain Curves (Ambient temperature: $\pm 25^\circ\text{C}$)

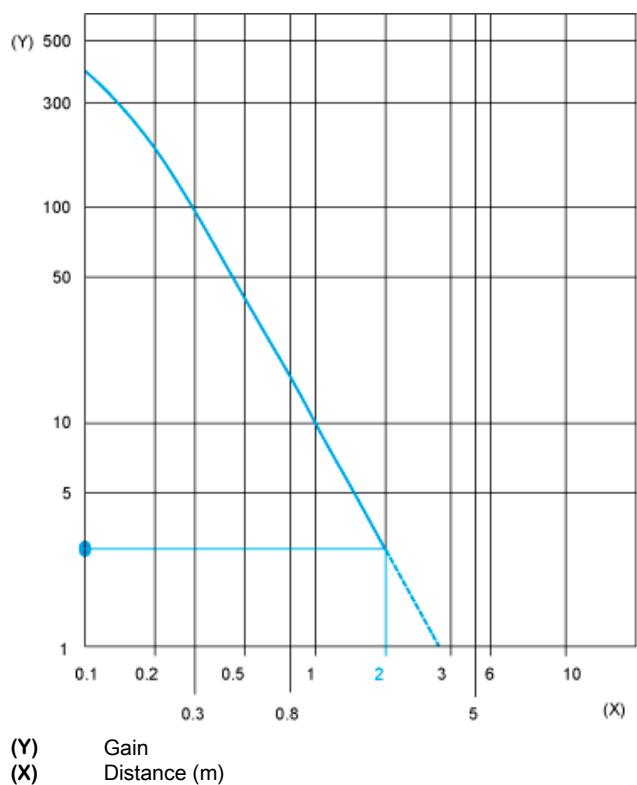

Recommended replacement(s)