

# Product datasheet

Specifications



male, M12, 4-pin, straight connector  
- cable gland Pg 7

XZCC12MDM40B

## Main

Range of product	Telemecanique Cabling components
Accessory / separate part category	Cabling accessories
Accessory / separate part type	Connector
Electrical connection	Straight male connector M12, 4 pins
Collar material	Metal
Status LED	Without
Cable connection	Screw terminal / wire size <0.75 mm <sup>2</sup> / clamping capacity 3...6 mm

## Complementary

Cable gland type	Pg 7
Cable connector fixing	Screw-on
[Ue] rated operational voltage	125 V AC 150 V DC
[In] rated current	3 A
Enclosure material	Plastic
Minimum insulating resistance	1000 GΩ
Contact resistance	8000 µOhm
Net weight	0.025 kg

## Environment

IP degree of protection	IP67
Ambient air temperature for operation	-40...85 °C

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.000 cm
Package 1 Width	5.000 cm
Package 1 Length	9.000 cm

Package 1 Weight	24.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	100
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	2.790 kg
Unit Type of Package 3	P06
Number of Units in Package 3	1200
Package 3 Height	60.000 cm
Package 3 Width	60.000 cm
Package 3 Length	80.000 cm
Package 3 Weight	41.750 kg

## Offer Sustainability


REACh Regulation	<a href="#">REACh Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>

## Contractual warranty

Warranty	18 months
----------	-----------

Dimensions


---

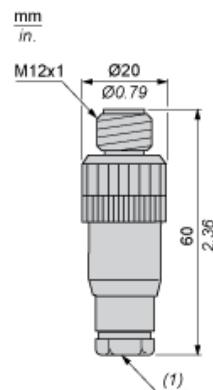

(1) Cable gland : no. 7 plastic (Pg 7)

### Connections and Schemes

---



### Recommended replacement(s)