

Product datasheet

Specifications



pre-wired connectors XZ - straight female - M12 - 4 pins - cable PUR 5m

XZCP1141L5

Main

Range of product Telemecanique Cabling components

Accessory / separate part category Cabling accessory

Accessory / separate part type Pre-wired connectors

Series name General purpose

Complementary

Electrical connection Straight female connector M12, 4 pins

Cable connector fixing Interlocked
Screw-on

Collar material Metal

Status LED Without

Cable length 5 m

Cable outer diameter 5.2 mm

Cable composition 4 x 0.34 mm²

Wire insulation material PUR

[Ue] rated operational voltage 250 V AC
300 V DC

[In] rated current 4 A

Contact resistance 5000 µOhm

Minimum insulating resistance 1 GΩ

Net weight 0.19 kg

Environment

IP degree of protection IP65
IP69K
IP67

Product certifications cULus

Ambient air temperature for operation -40...80 °C static
-5...80 °C flexing

Ambient air temperature for storage -40...80 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.0 cm
Package 1 Width	17.0 cm
Package 1 Length	17.0 cm
Package 1 Weight	154.0 g
Unit Type of Package 2	S02
Number of Units in Package 2	20
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	3.436 kg
Unit Type of Package 3	P06
Number of Units in Package 3	320
Package 3 Height	77.0 cm
Package 3 Width	80.0 cm
Package 3 Length	60.0 cm
Package 3 Weight	55.28 kg


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Contractual warranty

Warranty	18 months
-----------------	-----------


Dimensions

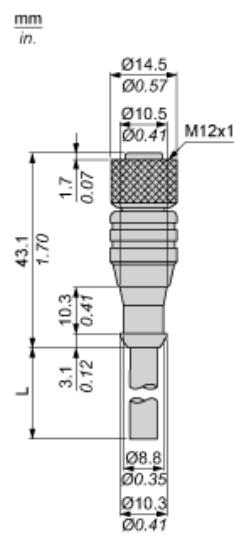

L : Length of cable

Connections and Schemes

Connector



BN : Brown

BK : Black

BU : Blue

WH : White

Recommended replacement(s)