

Product data sheet

Specifications



Pre wired connectors XZ, straight female, M8, 3 pins, cable PVC 10 m

XZCPV0566L10

Main

Range of product Telemecanique Cabling components

Accessory / separate part category Cabling accessory

Accessory / separate part type Pre-wired connectors

Series name General purpose

Complementary

Electrical connection Straight female connector M8, 3 pins

Cable connector fixing Screw-on

Collar material Metal

Status LED Without

Cable length 10 m

Cable outer diameter 4.6 mm

Cable composition 3 x 0.25 mm²

Wire insulation material PVC

[Ue] rated operational voltage 60 V AC
75 V DC

[In] rated current 3 A

Contact resistance 5000 µOhm

Minimum insulating resistance 1 GΩ

Net weight 0.316 kg

Environment

IP degree of protection IP67
IP65

Product certifications cULus

Ambient air temperature for operation -25...80 °C static

Ambient air temperature for storage -25...80 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.500 cm
Package 1 Width	18.000 cm
Package 1 Length	18.000 cm
Package 1 Weight	289.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	10
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	3.232 kg
Unit Type of Package 3	P06
Number of Units in Package 3	160
Package 3 Height	77.000 cm
Package 3 Width	80.000 cm
Package 3 Length	60.000 cm
Package 3 Weight	62.500 kg


Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
California proposition 65	WARNING: This product can expose you to chemicals including: Diisobutyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isobutyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Contractual warranty

Warranty	18 months
-----------------	-----------


Dimensions

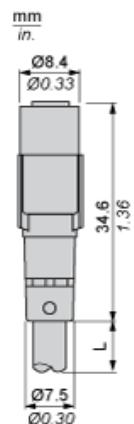

L : Lenght of cable

Connections and Schemes

Connector



BU : Blue

BN : Brown

BK : Black

Recommended replacement(s)