

Product data sheet

Specifications



Pre wired connectors XZ, straight female, M12, 4 pins, cable PVC 2 m

XZCPV1141L2

Main

Range of product Telemecanique Cabling components

Accessory / separate part category Cabling accessory

Accessory / separate part type Pre-wired connectors

Series name General purpose

Complementary

Electrical connection Straight female connector M12, 4 pins

Cable connector fixing Screw-on

Collar material Metal

Status LED Without

Cable length 2 m

Cable outer diameter 4.6 mm

Cable composition 4 x 0.25 mm²

Wire insulation material PVC

[Ue] rated operational voltage 250 V AC
300 V DC

[In] rated current 3 A

Contact resistance 5000 µOhm

Minimum insulating resistance 1 GΩ

Net weight 0.09 kg

Environment

IP degree of protection IP65
IP67

Product certifications cULus

Ambient air temperature for operation -25...80 °C static

Ambient air temperature for storage -25...80 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.500 cm
Package 1 Width	15.000 cm
Package 1 Length	16.000 cm
Package 1 Weight	78.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	40
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	3.381 kg


Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
California proposition 65	WARNING: This product can expose you to chemicals including: Diisobutyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isobutyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Contractual warranty

Warranty	18 months
-----------------	-----------


Dimensions

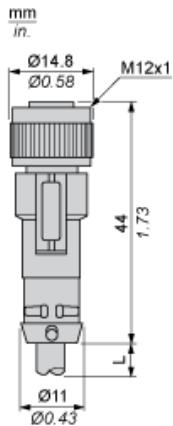

L : Lenght of cable

Connections and Schemes

Connector



BN : Brown

BK : Black

BU : Blue

WH : White

Recommended replacement(s)