

G-INS-M40-L68N-PNES-GY - Cable gland

1424479

<https://www.phoenixcontact.com/us/products/1424479>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: PA, external cable diameter 22 mm ... 32 mm, shielding: no, connecting thread: M40 x 1.5, color: silver-grey RAL 7001

Your advantages

- Plastic material conforms to UL 746C f1

Commercial data

Item number	1424479
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	BF68
Product key	BF7DCX
Catalog page	Page 686 (C-2-2019)
GTIN	4055626372693
Weight per piece (including packing)	76.77 g
Weight per piece (excluding packing)	76.17 g
Customs tariff number	39269097
Country of origin	TR

Technical data

Mounting

Assembly instructions	1) Mount screw connection support in the housing using the correct torque 2) Insert cable 3) Tighten union nut using the correct torque
-----------------------	---


Product properties

Product type	Full screw connection
No. of conductors	1
Manufacturer	BIMED
Manufacturer Designation	BM-08
Shielded	no
Execution of the strain relief	A

Characteristics

Category of shock impact	4
Design, Strain relief	A

Dimensions

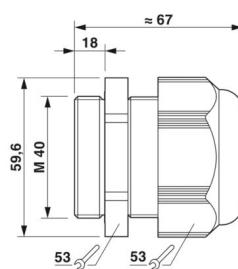Dimensional drawing	
	
Length	55 mm
Length of the connecting thread	18 mm
Hole diameter	40.1 mm ... 40.3 mm
Wrench size, union nut	53 mm
Wrench size, support	53 mm
Hexagon angular dimension	59.6 mm
Thread type connection side	M40 x 1.5
Thread pitch	1.5 mm

Connection data

Tightening torque	20 Nm ± 1.5 Nm (Cap nut) 5 Nm (Support sleeve)
-------------------	---

Material specifications

Color	silver grey (RAL 7001)
Flammability rating according to UL 94	V2

G-INS-M40-L68N-PNES-GY - Cable gland

1424479

<https://www.phoenixcontact.com/us/products/1424479>



Seal material Cable seal	CR
Material for screw connection	PA

Cable/line

External cable diameter (Cable 1)	22 mm ... 32 mm
External cable diameter ()	22 mm ... 32 mm (for UL 514 B)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66
	IP68 (5 bar / 0.5 h)
Enclosure rating (NEMA)	1
	4
	4X
	12
	13
Ambient temperature (operation)	-40 °C ... 100 °C (static)

G-INS-M40-L68N-PNES-GY - Cable gland




1424479

<https://www.phoenixcontact.com/us/products/1424479>

Drawings

Dimensional drawing

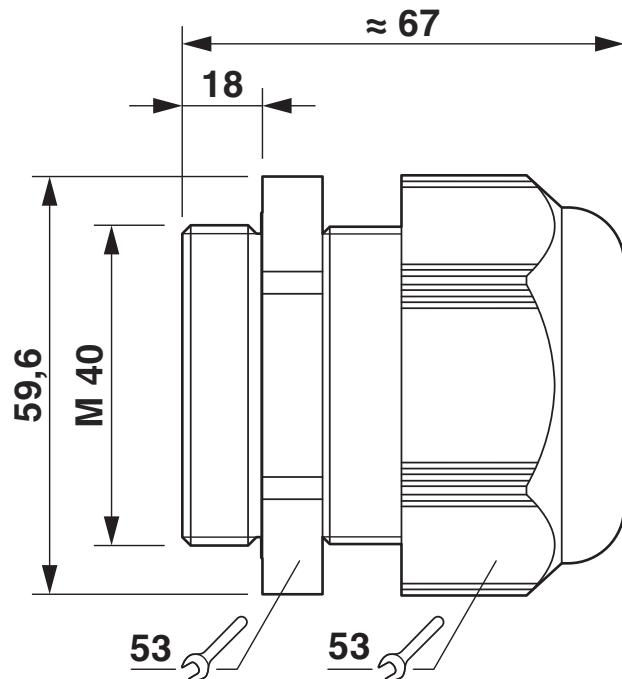

Dimensional drawing

G-INS-M40-L68N-PNES-GY - Cable gland

1424479

<https://www.phoenixcontact.com/us/products/1424479>



Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1424479>

DNV

Approval ID: TAE00003WX



CSA

Approval ID: 115116



UL Listed

Approval ID: E199260



cUL Listed

Approval ID: E199260

cJLus Listed

G-INS-M40-L68N-PNES-GY - Cable gland

1424479

<https://www.phoenixcontact.com/us/products/1424479>



Classifications

ECLASS

ECLASS-11.0	27144432
ECLASS-12.0	27140801
ECLASS-13.0	27140801

ETIM

ETIM 9.0	EC000441
----------	----------

UNSPSC

UNSPSC 21.0	39121300
-------------	----------

G-INS-M40-L68N-PNES-GY - Cable gland

1424479

<https://www.phoenixcontact.com/us/products/1424479>



Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e No hazardous substances above threshold values
------------	---

G-INS-M40-L68N-PNES-GY - Cable gland

1424479

<https://www.phoenixcontact.com/us/products/1424479>



Accessories

A-INL-M40-P-LG - Counter nut

1417664

<https://www.phoenixcontact.com/us/products/1417664>

Counter nut, for threads M40 x 1.5, color: light grey



SEALING PLUG 14X22 RD - Closing cap

1400270

<https://www.phoenixcontact.com/us/products/1400270>

Closing cap, for threads pluggable, color: red



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com